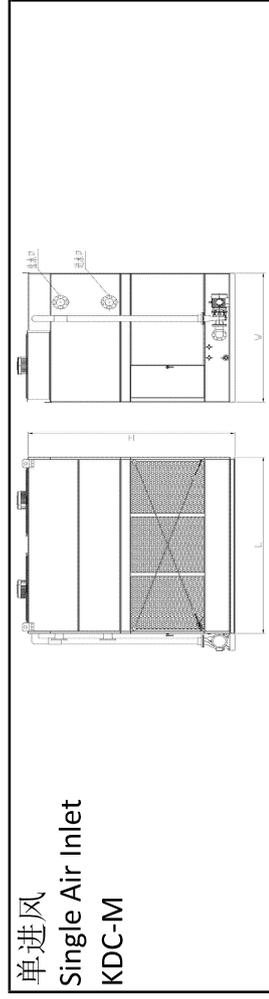
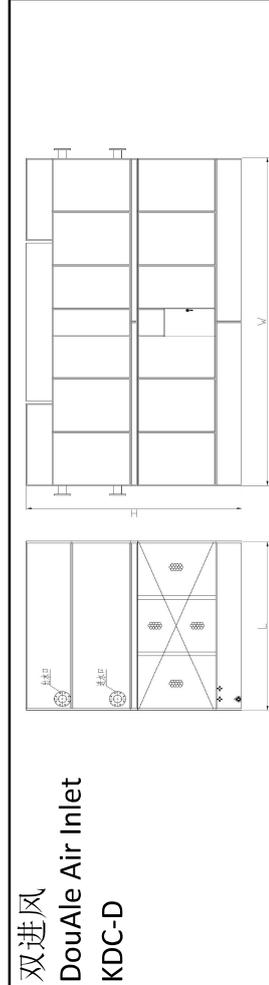
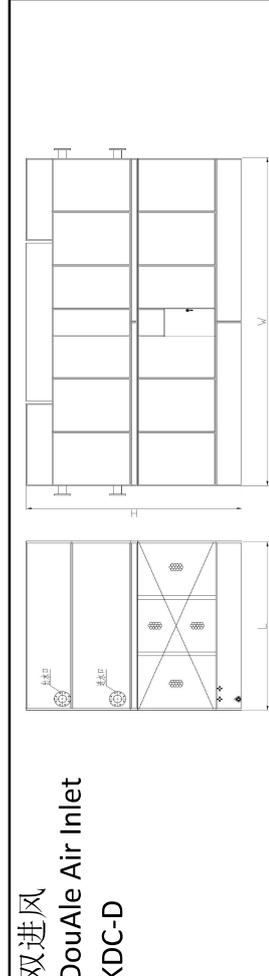


型号 Model	水量 Flow Rate (m ³ /h)	外形尺寸 Dimension(mm)			传动系统 Fan Drive		喷淋泵 Pump Motor (kw)	配管规格 Pipe Connection(mm)				
		长(L) Length	宽(W) Width	高(H) Height	Diameter φm/m	Motor (kw)		进出水口 Inlet/Outlet	溢流口 Drain	排污口 Over flow	补水口 Automatic	
												长(L) Length
KDC-M1418A-GLF	10	1400	1800	2800	1000	1.1	0.75	65	32	32	32	Automatic
KDC-M1418A-GLG	11	1400	1800	2800	1000	1.5	0.75					
KDC-M1418A-GLH	12	1400	1800	2800	1000	2.2	0.75					
KDC-M1418A-GLI	13	1400	1800	2800	1000	3	0.75					
KDC-M1519A-GLF	13	1500	1900	2800	1000	1.1	0.75	80	32	32	32	Automatic
KDC-M1519A-GLG	15	1500	1900	2800	1000	1.5	0.75					
KDC-M1519A-GLH	17	1500	1900	2800	1000	2.2	0.75					
KDC-M1519A-GLI	19	1500	1900	2800	1000	3	0.75					
KDC-M2018A-GLF	21	2000	1800	2800	900	1.1x2	0.75	80	32	32	32	Automatic
KDC-M2018A-GLG	23	2000	1800	2800	900	1.5x2	0.75					
KDC-M2018A-GLH	26	2000	1800	2800	900	2.2x2	0.75					
KDC-M2018A-GLI	29	2000	1800	2800	900	3x2	0.75					
KDC-M2419A-GLF	27	2400	1900	3000	1000	1.1x2	1.5	100	40	40	40	Automatic
KDC-M2419A-GLG	30	2400	1900	3000	1000	1.5x2	1.5					
KDC-M2419A-GLH	34	2400	1900	3000	1000	2.2x2	1.5					
KDC-M2419A-GLI	38	2400	1900	3000	1000	3x2	1.5					
KDC-M2620A-GLG	35	2600	2000	3000	1000	1.5x2	1.5	100	40	40	40	Automatic
KDC-M2620A-GLH	40	2600	2000	3000	1000	2.2x2	1.5					
KDC-M2620A-GLI	44	2600	2000	3000	1000	3x2	1.5					
KDC-M2620A-GIJ	48	2600	2000	3000	1000	4x2	1.5					
KDC-M3023A-GLG	40	3000	2300	3200	1200	1.5x2	1.5	100	40	40	40	Automatic
KDC-M3023A-GLH	45	3000	2300	3200	1200	2.2x2	1.5					









型号 Model	水量 Flow Rate (m ³ /h)	外形尺寸 Dimension(mm)			传动系统 Fan Drive		喷淋泵 Pump Motor (kw)	配管规格 Pipe Connection(mm)						
		长(L) Length	宽(W) Width	高(H) Height	Diameter φm/m	Motor (kw)		溢流口 Drain	排污水口 Over flow	补水口 Automatic	Inlet/Outlet			
												3x2	4x2	2.2x2
KDC-M3023A-GLI	50	3000	2300	3200	1200	3x2	1.5							
KDC-M3023A-GLJ	55	3000	2300	3200	1200	4x2	1.5							
KDC-M3022A-GLH	46	3000	2200	3700	1000	2.2x2	2.2							
KDC-M3022A-GLI	52	3000	2200	3700	1000	3x2	2.2							
KDC-M3022A-GLJ	57	3000	2200	3700	1000	4x2	2.2							
KDC-M3022A-GLL	63	3000	2200	3700	1000	5.5x2	2.2							
KDC-M3324A-GLH	59	3300	2400	3400	1200	2.2x2	2.2							
KDC-M3324A-GLI	65	3300	2400	3400	1200	3x2	2.2							
KDC-M3324A-GLJ	78	3300	2400	3600	1200	4x2	2.2							
KDC-M3324A-GLL	86	3300	2400	3400	1200	5.5x2	2.2							
KDC-M3622A-GLH	65	3600	2200	3700	1000	2.2x3	2.2							
KDC-M3622A-GLI	72	3600	2200	3700	1000	3x3	2.2							
KDC-M3622A-GLJ	80	3600	2200	3700	1000	4x3	2.2							
KDC-M3622A-GLL	89	3600	2200	3700	1000	5.5x3	2.2							
KDC-M3628A-GLH	66	3600	2800	3500	1500	2.2x2	2.2							
KDC-M3628A-GLI	73	3600	2800	3500	1500	3x2	2.2							
KDC-M3628A-GLJ	80	3600	2800	3500	1500	4x2	2.2							
KDC-M3628A-GLL	89	3600	2800	3500	1500	5.5x2	2.2							
KDC-M4522A-GLH	67	4500	2200	3900	1000	2.2x3	2.2							
KDC-M4522A-GLI	74	4500	2200	3900	1000	3x3	2.2							
KDC-M4522A-GLJ	81	4500	2200	3900	1000	4x3	2.2							
KDC-M4522A-GLL	90	4500	2200	3900	1000	5.5x3	2.2							




单进风
Single Air Inlet
KDC-M

双进风
DouAle Air Inlet
KDC-D






型号 Model	水量 Flow Rate (m ³ /h)	外形尺寸 Dimension(mm)			传动系统 Fan Drive		喷淋泵 Pump Motor (kw)	配管规格 Pipe Connection(mm)														
		长(L) Length	宽(W) Width	高(H) Height	Diameter φm/m	Motor (kw)		进出水口 Inlet/Outlet	溢流口 Drain	排污口 Over flow	补水口 Automatic											
												长(L) Length	宽(W) Width	高(H) Height								
单进风 Single Air Inlet KDC-M					双进风 DouAle Air Inlet KDC-D							183	5400	3400	4300	1600	5.5x3	5.5	150x2	50	50	50
												202	5400	3400	4300	1600	7.5x3	5.5	150x2	50	50	50
												202	5400	3600	4800	1600	4x3	5.5	150x2	50	50	50
												225	5400	3600	4800	1600	5.5x3	5.5	150x2	50	50	50
												250	5400	3600	4800	1600	7.5x3	5.5	150x2	50	50	50
												280	5400	3600	4800	1600	11x3	5.5	150x2	50	50	50
												245	7200	3600	4800	1600	4x4	4x2	200x2	50	50	50
												272	7200	3600	4800	1600	5.5x4	4x2	200x2	50	50	50
												302	7200	3600	4800	1600	7.5x4	4x2	200x2	50	50	50
												350	7200	3600	4800	1600	11x4	4x2	200x2	50	50	50
												53	2400	4000	3300	2200	4	2.2	100x2	40	40	40
												59	2400	4000	3300	2200	5.5	2.2	100x2	40	40	40
												65	2400	4000	3300	2200	7.5	2.2	100x2	40	40	40
												74	2400	4000	3300	2200	11	2.2	100x2	40	40	40
												68	2400	4300	3400	2200	5.5	2.2	100x2	40	40	40
												75	2400	4300	3400	2200	7.5	2.2	100x2	40	40	40
85	2400	4300	3400	2200	11	2.2	100x2	40	40	40												
94	2400	4300	3400	2200	15	2.2	100x2	40	40	40												
88	2700	4700	3400	2400	7.5	2.2	100x2	40	40	40												
100	2700	4700	3400	2400	11	2.2	100x2	40	40	40												
110	2700	4700	3400	2400	15	2.2	100x2	40	40	40												
118	2700	4700	3400	2400	18.5	2.2	100x2	40	40	40												






型号 Model	水量 Flow Rate (m ³ /h)	外形尺寸 Dimension(mm)			传动系统 Fan Drive		喷淋泵 Pump Motor (kw)	配管规格 Pipe Connection(mm)						
		长(L) Length	宽(W) Width	高(H) Height	Diameter φm/m	Motor (kw)		进出水口 Inlet/Outlet	溢流口 Drain	排污口 Over flow	补水口 Automatic			
		2700	4800	3600	2400	7.5		125×2	40					
KDC-D2748A-GLM	106	2700	4800	3600	2400	7.5	4							
KDC-D2748A-GLN	120	2700	4800	3600	2400	11	4							
KDC-D2748A-GLP	133	2700	4800	3600	2400	15	4							40
KDC-D2748A-GLR	142	2700	4800	3600	2400	18.5	4							
KDC-D2751A-GLM	111	2700	5100	3800	2400	7.5	4							
KDC-D2751A-GLN	126	2700	5100	3800	2400	11	4							40
KDC-D2751A-GLP	140	2700	5100	3800	2400	15	4							
KDC-D2751A-GLR	150	2700	5100	3800	2400	18.5	4							
KDC-D3154A-GLN	134	3100	5400	3800	2800	11	2.2×2							
KDC-D3154A-GLP	149	3100	5400	3800	2800	15	2.2×2							40
KDC-D3154A-GLR	160	3100	5400	3800	2800	18.5	2.2×2							
KDC-D3154A-GLT	169	3100	5400	3800	2800	22	2.2×2							
KDC-D3158A-GLN	151	3100	5800	3900	3000	11	2.2×2							
KDC-D3158A-GLP	168	3100	5800	3900	3000	15	2.2×2							40
KDC-D3158A-GLR	180	3100	5800	3900	3000	18.5	2.2×2							
KDC-D3158A-GLT	191	3100	5800	3900	3000	22	2.2×2							
KDC-D3161A-GLN	159	3100	6100	4100	3000	11	4×2							
KDC-D3161A-GLP	176	3100	6100	4100	3000	15	4×2							50
KDC-D3161A-GLR	189	3100	6100	4100	3000	18.5	4×2							
KDC-D3161A-GLT	200	3100	6100	4100	3000	22	4×2							
KDC-D3161A-GLU	221	3100	6100	4100	3000	30	4×2							
KDC-D3364A-GLN	175	3300	6400	4100	3200	11	4×2							



单进风
Single Air Inlet
KDC-M

双进风
DouAle Air Inlet
KDC-D

型号 Model	水量 Flow Rate (m ³ /h)	外形尺寸 Dimension(mm)			传动系统 Fan Drive		喷淋泵 Pump Motor (kw)	配管规格 Pipe Connection(mm)														
		长(L) Length	宽(W) Width	高(H) Height	Diameter φm/m	Motor (kw)		进出水口 Inlet/Outlet	溢流口 Drain	排污口 Over flow	补水口 Automatic											
												长(L) Length	宽(W) Width	高(H) Height								
单进风 Single Air Inlet KDC-M					双进风 DouAle Air Inlet KDC-D							194	3300	6400	4100	3200	15	4x2	150x2	50	50	50
												208	3300	6400	4100	3200	18.5	4x2	150x2	50	50	50
												220	3300	6400	4100	3200	22	4x2	150x2	50	50	50
												244	3300	6400	4100	3200	30	4x2	150x2	50	50	50
												179	3600	6800	4500	3500	11	4x2	150x2	50	50	50
												198	3600	6800	4500	3500	15	4x2	150x2	50	50	50
												212	3600	6800	4500	3500	18.5	4x2	150x2	50	50	50
												225	3600	6800	4500	3500	22	4x2	150x2	50	50	50
												250	3600	6800	4500	3500	30	4x2	150x2	50	50	50
												268	3600	6800	4500	3500	37	4x2	150x2	50	50	50
												215	3600	7000	4700	3500	11	5.5x2	200x2	50	50	50
												239	3600	7000	4700	3500	15	5.5x2	200x2	50	50	50
												256	3600	7000	4700	3500	18.5	5.5x2	200x2	50	50	50
												271	3600	7000	4700	3500	22	5.5x2	200x2	50	50	50
												300	3600	7000	4700	3500	30	5.5x2	200x2	50	50	50
												322	3600	7000	4700	3500	37	5.5x2	200x2	50	50	50
259	3600	7500	4900	3500	15	5.5x2	200x2	50	50	50												
278	3600	7500	4900	3500	18.5	5.5x2	200x2	50	50	50												
294	3600	7500	4900	3500	22	5.5x2	200x2	50	50	50												
326	3600	7500	4900	3500	30	5.5x2	200x2	50	50	50												
350	3600	7500	4900	3500	37	5.5x2	200x2	50	50	50												
374	3600	7500	4900	3500	45	5.5x2	200x2	50	50	50												

型号 Model	水量 Flow Rate (m ³ /h)	外形尺寸 Dimension(mm)			传动系统 Fan Drive		喷淋泵 Pump Motor (kw)	配管规格 Pipe Connection(mm)								
		长(L) Length	宽(W) Width	高(H) Height	Diameter φm/m	Motor (kw)		进出水口 Inlet/Outlet	溢流口 Drain	排污口 Over flow	补水口 Automatic					
												长(L) Length	宽(W) Width	高(H) Height		
单进风 Single Air Inlet KDC-M																
双进风 DouAle Air Inlet KDC-D																
KDC-D4285A-GLW	437	4200	8500	5400	4000	45	7.5x2									
KDC-D4285A-GLX	467	4200	8500	5400	4000	55	7.5x2									
KDC-D4590A-GLT	373	4500	9000	5400	4200	22	7.5x2									
KDC-D4590A-GLU	414	4500	9000	5400	4200	30	7.5x2									
KDC-D4590A-GLV	444	4500	9000	5400	4200	37	7.5x2									
KDC-D4590A-GLW	474	4500	9000	5400	4200	45	7.5x2									
KDC-D4590A-GLX	507	4500	9000	5400	4200	55	7.5x2									
KDC-D4590A-GLY	608	4500	9000	5600	4200	75	7.5x2									
KDC-D48A0A-GLU	456	4800	10000	5400	4600	30	11x2									
KDC-D48A0A-GLV	489	4800	10000	5400	4600	37	11x2									
KDC-D48A0A-GLW	522	4800	10000	5400	4600	45	11x2									
KDC-D48A0A-GLX	558	4800	10000	5400	4600	55	11x2									
KDC-D48A0A-GLY	619	4800	10000	5400	4600	75	11x2									
KDC-D48A0A-GL2	658	4800	10000	5400	4600	90	11x2									
KDC-D52A8A-GLV	563	5200	10800	5400	4800	37	11x2									
KDC-D52A8A-GLW	601	5200	10800	5400	4800	45	11x2									
KDC-D52A8A-GLX	643	5200	10800	5400	4800	55	11x2									
KDC-D52A8A-GLY	713	5200	10800	5400	4800	75	11x2									
KDC-D52A8A-GL2	758	5200	10800	5400	4800	90	11x2									
KDC-D52A8A-GL3	810	5200	10800	5400	4800	110	11x2									
KDC-D54C0A-GLW	648	5400	12000	6200	5000	45	15x2									
KDC-D54C0A-GLX	693	5400	12000	6200	5000	55	15x2									

单进风 Single Air Inlet KDC-M		外形尺寸 Dimension(mm)		传动系统 Fan Drive		喷淋泵 Pump		配管规格 Pipe Connection(mm)			
型号 Model	水量 Flow Rate (m ³ /h)	长(L) Length	宽(W) Width	高(H) Height	直径 Diameter φm/m	电机 Motor (kw)	电机 Motor (kw)	进出水口 Inlet/Outlet	溢流口 Drain	排污口 Over flow	补水口 Automatic
		KDC-D54C0A-GLY	768	5400	12000	6200	5000	75	15x2	300x2	65
KDC-D54C0A-GL2	816	5400	12000	6200	5000	90	15x2				
KDC-D54C0A-GL3	873	5400	12000	6200	5000	110	15x2				
KDC-D54C0A-GL4	928	5400	12000	6200	5000	132	15x2				
Remark:											
1、Nominal flow rate is Based on inlet temperature at 37℃, Outlet temperature at 32℃, Wet Bulb temperature at 28℃。											

