


HKD-FL/HKD-FU/HKD-T-FL/HKD-T-FU 結構圖 Structural Drawing

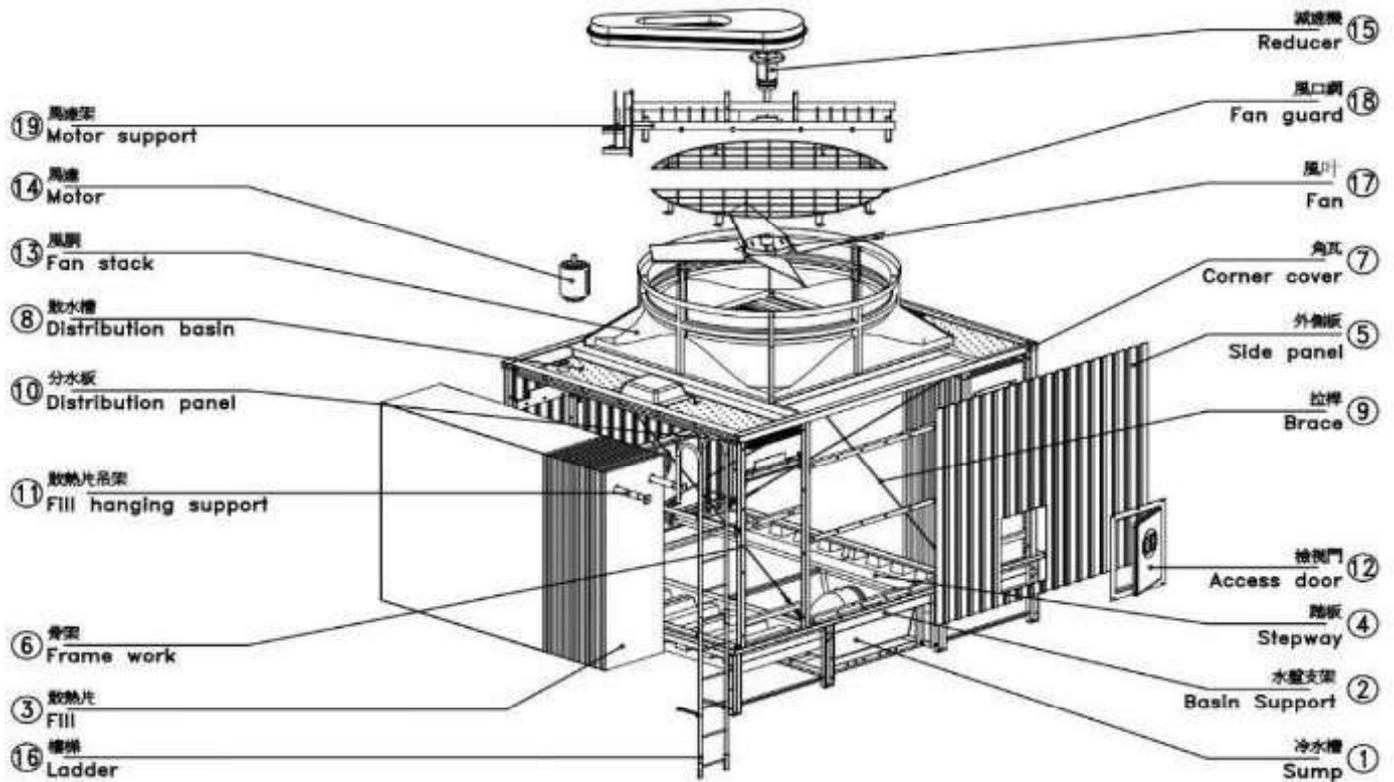


件號 Item	零件Parts	材質Material
1	冷水槽Sump	F.R.P.
2	水盤支架Basin support	H.D.G.Steel
3	散熱片Fill	P.V.C
4	踏板Stepway	H.D.G.Steel
5	外側板Side panel	F.R.P.
6	骨架Frame work	H.D.G.Steel
7	角瓦Corner cover	F.R.P.
8	散水槽Distribution basin	F.R.P.
9	拉桿Brace	H.D.G.Steel
10	分水板Distribution panel	P.V.C

件號 Item	零件Parts	材質Material
11	散熱片吊架Fill hanging support	H.D.G.Steel
12	檢視門Access door	F.R.P.
13	風胴Fan stack	F.R.P.
14	馬達Motor	
15	減速機Reducer	
16	樓梯Ladder	H.D.G.Steel
17	風葉Fan	F.R.P./AL ALLOY
18	風口網Fan guard	H.D.G.Steel
19	馬達架Motor support	H.D.G.Steel
20		

HKD-GL/HKD-GU/HKD-T-GL/HKD-T-GU /HKD-T-HL/HKD-T-HU


結構圖Structural Darwing

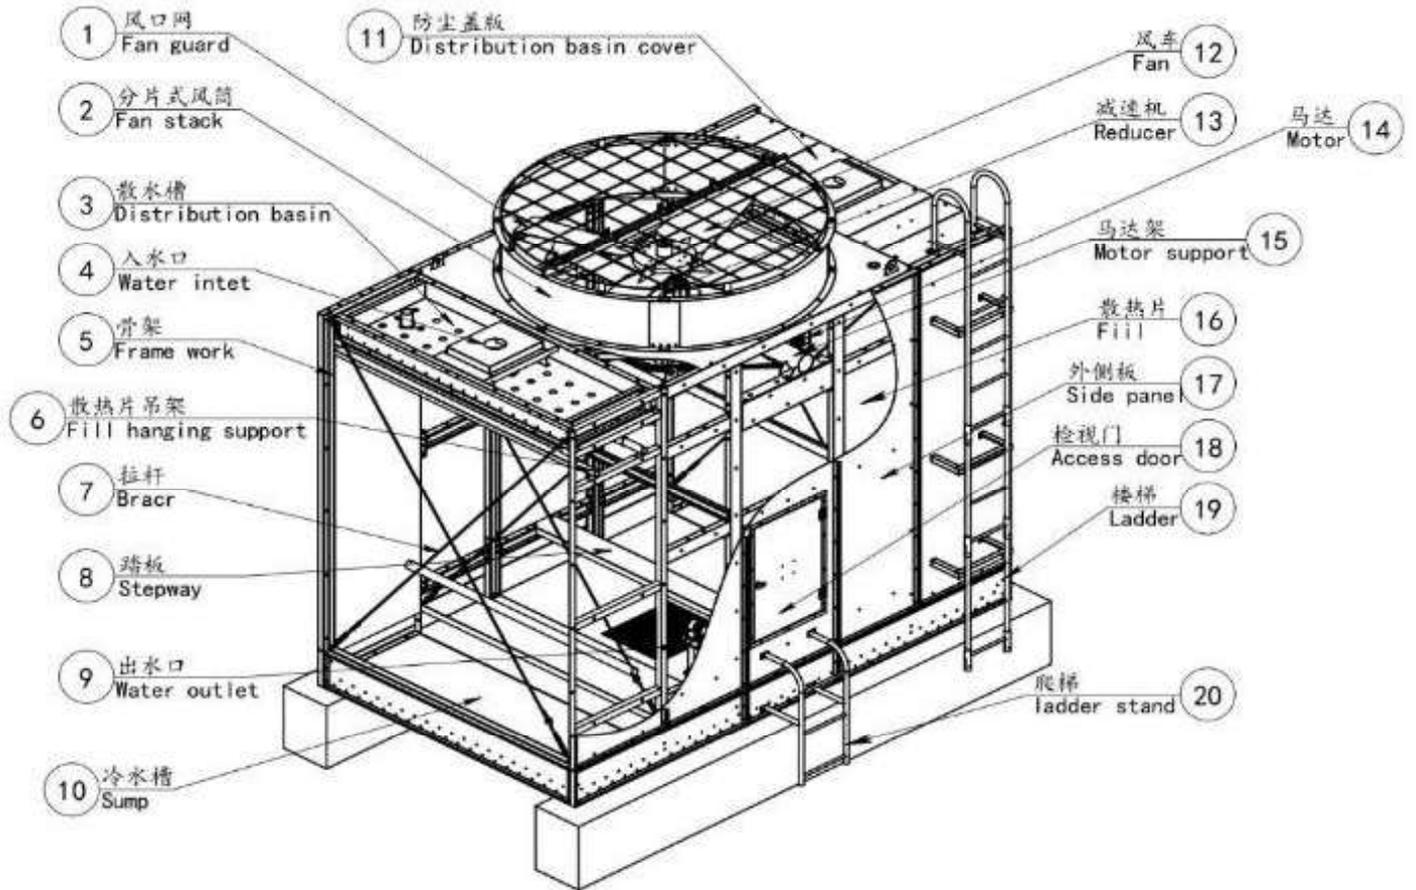

件號 Item	零件Parts	材質Material
1	風口網Fan guard	H.D.G.Steel
2	風洞Fan stack	H.D.G.Steel
3	散水槽Distribution basin	H.D.G.Steel
4	入水口Water Inlet	H.D.G.Steel
5	骨架Frame work	H.D.G.Steel
6	散熱片吊架Fill hanging support	H.D.G.Steel
7	拉桿Brace	H.D.G.Steel
8	踏板Stepway	H.D.G.Steel
9	出水口Water Outlet	H.D.G.Steel
10	冷水槽Sump	H.D.G.Steel

件號 Item	零件Parts	材質Material
11	防塵蓋板Distribution basin cover	H.D.G.Steel
12	風車Fan	F.R.P./AL ALLOY
13	減速機Reducer	H.D.G.Steel
14	馬達Motor	
15	馬達架Motor support	H.D.G.Steel
16	散熱片Fill	P.V.C
17	檢視門Access door	H.D.G.Steel
18	外側板Side panel	H.D.G.Steel
19	樓梯Ladder	H.D.G.Steel
20	爬梯Ladder Stand	H.D.G.Steel


HKD-FL-IT/HKD-T-FL-IT結構圖Structural Drawing

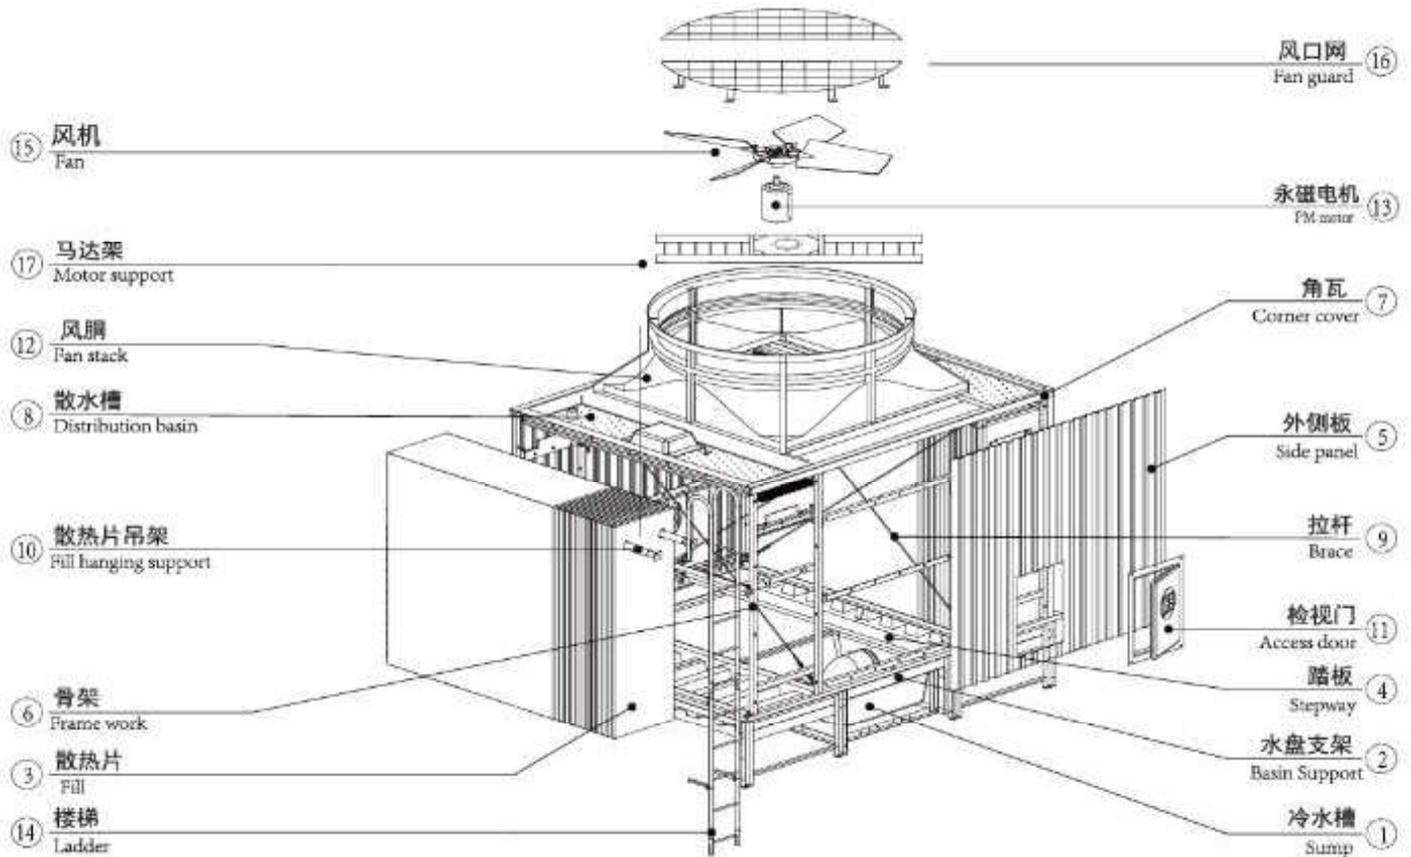

件號 Item	零件Parts	材質Material
1	冷水槽Sump	F.R.P.
2	水盤支架Basin support	H.D.G.Steel
3	散熱片Fill	P.V.C
4	踏板Stepway	H.D.G.Steel
5	外側板Side panel	F.R.P.
6	骨架Frame work	H.D.G.Steel
7	角瓦Corner cover	F.R.P.
8	散水槽Distribution basin	F.R.P.
9	拉桿Brace	H.D.G.Steel

件號 Item	零件Parts	材質Material
10	散熱片吊架Fill hanging support	H.D.G.Steel
11	檢視門Access door	F.R.P.
12	風胴Fan stack	F.R.P.
13	永磁電機PM Motor	
14	樓梯Ladder	H.D.G.Steel
15	風機Fan	F.R.P./AL ALLOY
16	風口網Fan guard	H.D.G.Steel
17	馬達架Motor support	H.D.G.Steel
18		


HKD-GL-IT/HKD-T-GL-IT結構圖Structural Darwing

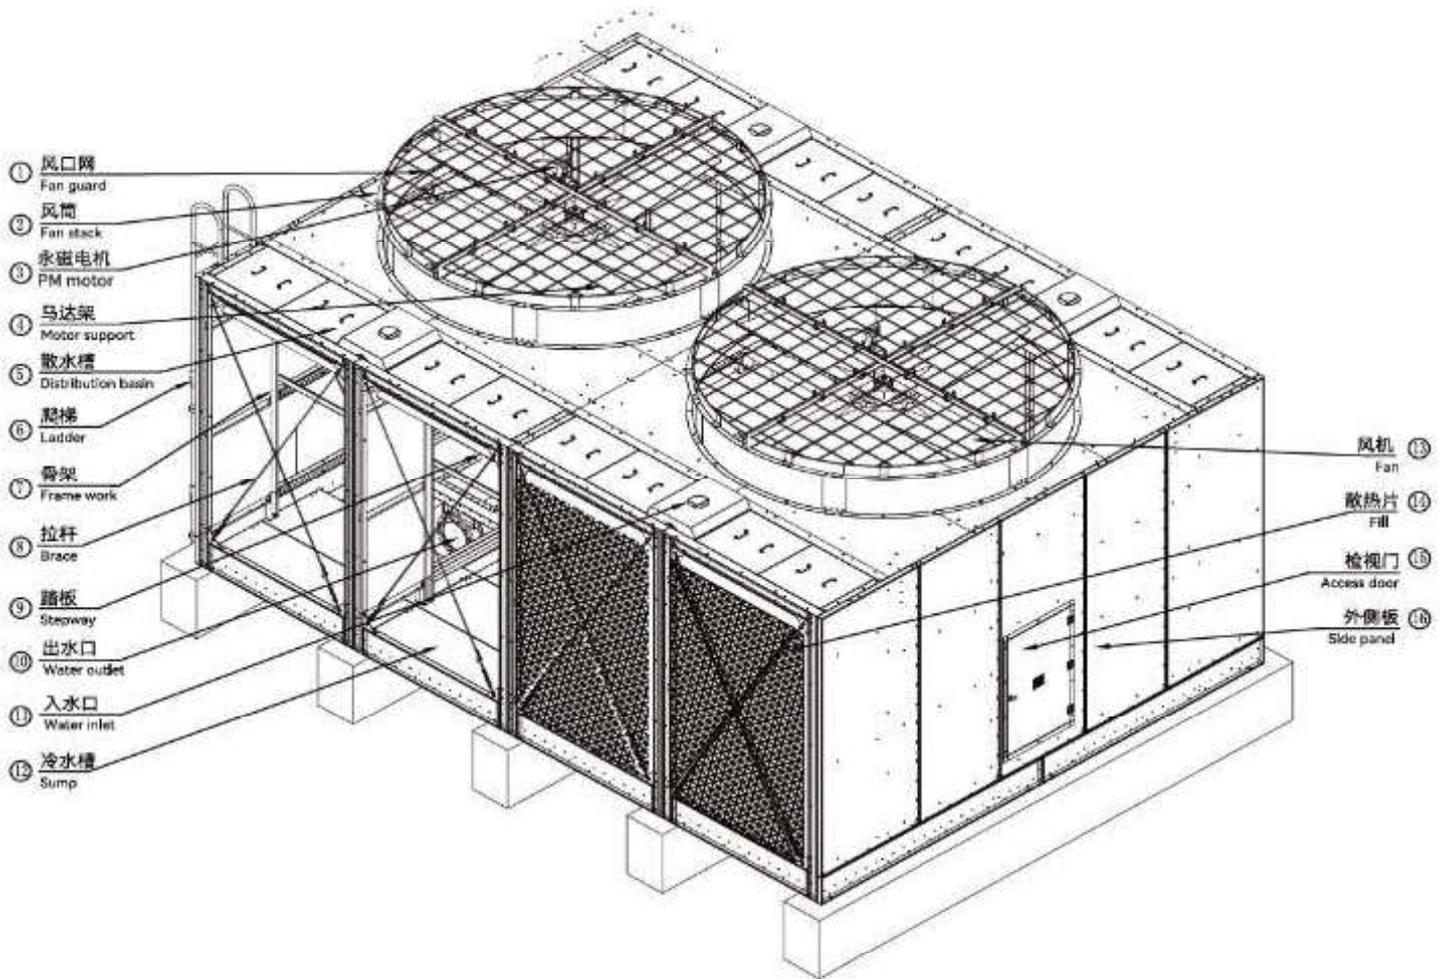

件號 Item	零件Parts	材質Material
1	風口網Fan guard	H.D.G.Steel
2	風筒Fan stack	H.D.G.Steel
3	永磁電機PM Motor	
4	馬達架Motor support	H.D.G.Steel
5	散水槽Distribution basin	H.D.G.Steel
6	樓梯Ladder	H.D.G.Steel
7	骨架Frame work	H.D.G.Steel
8	拉桿Brace	H.D.G.Steel

件號 Item	零件Parts	材質Material
9	踏板Stepway	H.D.G.Steel
10	出水口Water Outlet	H.D.G.Steel
11	入水口Water Inlet	H.D.G.Steel
12	冷水槽Sump	H.D.G.Steel
13	風車Fan	F.R.P./AL ALLOY
14	散熱片Fill	P.V.C
15	檢視門Access door	H.D.G.Steel
16	外側板Side panel	H.D.G.Steel


外型尺寸及标准规格
Dimension & Specification

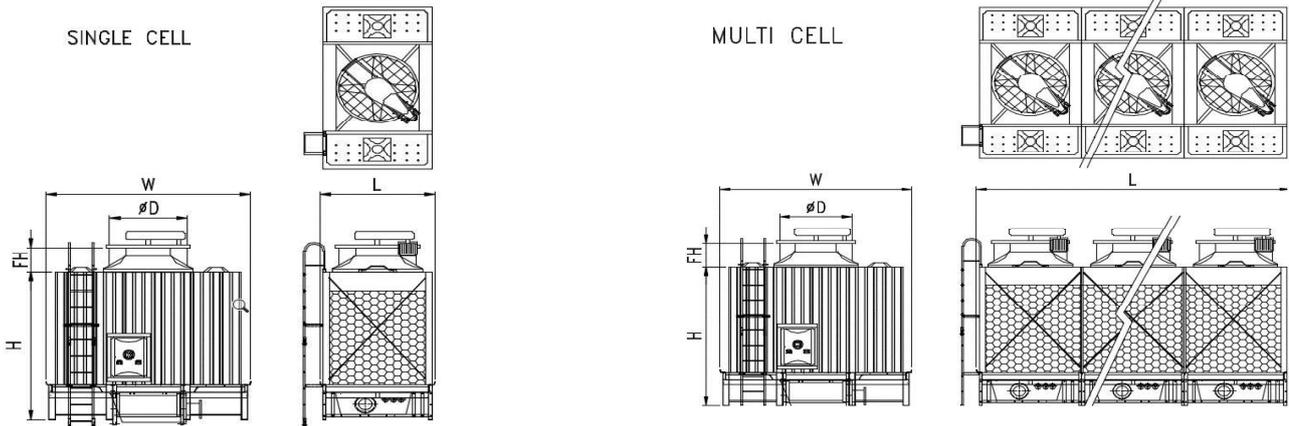

型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電動機 Fan Motor kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
509-FLG	1780	3440	2725	550	42	1.5	1500	3.3
509-FLH	1780	3440	2725	550	47	2.2	1500	3.3
509-FLK	1780	3440	2725	550	57	3.7	1500	3.3
509-FLJ	1780	3440	2725	550	57	4.0	1500	3.3
509-FLL	1780	3440	2725	550	65	5.5	1500	3.3
511-FLH	1780	3440	3025	550	55	2.2	1500	3.3
511-FLK	1780	3440	3025	550	66	3.7	1500	3.3
511-FLJ	1780	3440	3025	550	66	4.0	1500	3.3
511-FLL	1780	3440	3025	550	75	5.5	1500	3.3
511-FLM	1780	3440	3025	550	83	7.5	1500	3.3
514-FLH	2080	3440	3025	550	66	2.2	1500	3.3
514-FLK	2080	3440	3025	550	79	3.7	1500	3.3
514-FLJ	2080	3440	3025	550	79	4.0	1500	3.3
514-FLL	2080	3440	3025	550	90	5.5	1500	3.3
514-FLM	2080	3440	3025	550	99	7.5	1500	3.3
616-FLH	2080	3740	3025	700	79	2.2	1800	3.3
616-FLK	2080	3740	3025	700	94	3.7	1800	3.3
616-FLJ	2080	3740	3025	700	94	4.0	1800	3.3
616-FLL	2080	3740	3025	700	107	5.5	1800	3.3
616-FLM	2080	3740	3025	700	118	7.5	1800	3.3
719-FLH	2380	4040	3325	600	89	2.2	2100	3.6
719-FLK	2380	4040	3325	600	107	3.7	2100	3.6
719-FLJ	2380	4040	3325	600	107	4.0	2100	3.6
719-FLL	2380	4040	3325	600	121	5.5	2100	3.6
719-FLM	2380	4040	3325	600	133	7.5	2100	3.6
721-FLK	2680	4040	3325	600	110	3.7	2100	3.6
721-FLJ	2680	4040	3325	600	110	4.0	2100	3.6
721-FLL	2680	4040	3325	600	125	5.5	2100	3.6
721-FLM	2680	4040	3325	600	138	7.5	2100	3.6
721-FLN	2680	4040	3325	600	158	11	2100	3.6

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.


外型尺寸及标准规格
Dimension & Specification

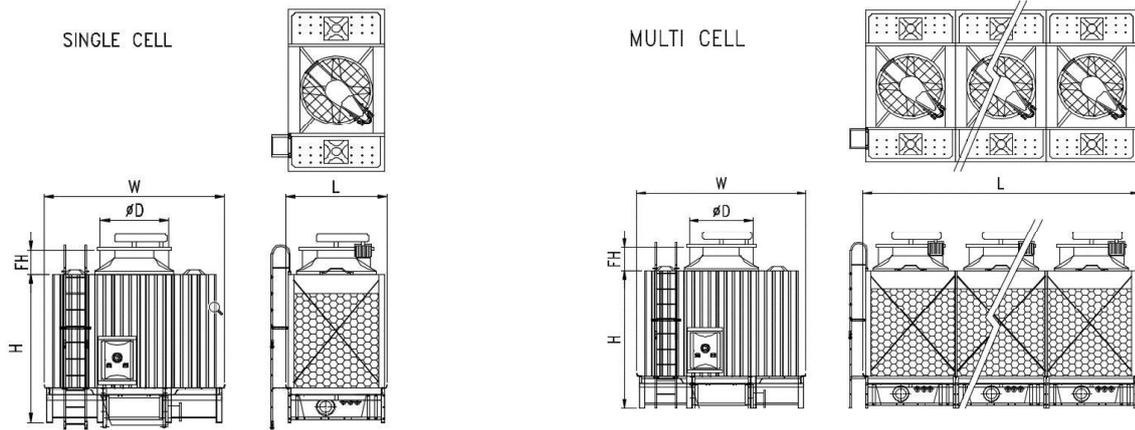

型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電動機 Fan Motor kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
724-FLK	2980	4040	3475	600	116	3.7	2100	3.8
724-FLJ	2980	4040	3475	600	116	4.0	2100	3.8
724-FLL	2980	4040	3475	600	133	5.5	2100	3.8
724-FLM	2980	4040	3475	600	146	7.5	2100	3.8
724-FLN	2980	4040	3475	600	168	11	2100	3.8
829-FLL	2980	4360	3475	650	140	5.5	2400	3.8
829-FLM	2980	4360	3475	650	154	7.5	2400	3.8
829-FLN	2980	4360	3475	650	176	11	2400	3.8
829-FLP	2980	4360	3475	650	194	15	2400	3.8
831-FLL	3320	4360	3475	650	156	5.5	2400	3.8
831-FLM	3320	4360	3475	650	171	7.5	2400	3.8
831-FLN	3320	4360	3475	650	196	11	2400	3.8
831-FLP	3320	4360	3475	650	216	15	2400	3.8
1034-FLL	3320	5000	3475	650	173	5.5	3000	3.8
1034-FLM	3320	5000	3475	650	190	7.5	3000	3.8
1034-FLN	3320	5000	3475	650	218	11	3000	3.8
1034-FLP	3320	5000	3475	650	239	15	3000	3.8
1036-FLM	3580	5000	3475	650	193	7.5	3000	3.8
1036-FLN	3580	5000	3475	650	221	11	3000	3.8
1036-FLP	3580	5000	3475	650	243	15	3000	3.8
1036-FLR	3580	5000	3475	650	262	18.5	3000	3.8
1039-FLM	3880	5000	3475	650	203	7.5	3000	3.8
1039-FLN	3880	5000	3475	650	232	11	3000	3.8
1039-FLP	3880	5000	3475	650	256	15	3000	3.8
1039-FLR	3880	5000	3475	650	275	18.5	3000	3.8
1144-FLM	4180	5400	3475	650	228	7.5	3400	3.8
1144-FLN	4180	5400	3475	650	261	11	3400	3.8
1144-FLP	4180	5400	3475	650	287	15	3400	3.8
1144-FLR	4180	5400	3475	650	310	18.5	3400	3.8
1149-FLM	4780	5400	3475	650	254	7.5	3400	3.8
1149-FLN	4780	5400	3475	650	290	11	3400	3.8
1149-FLP	4780	5400	3475	650	319	15	3400	3.8
1149-FLR	4780	5400	3475	650	344	18.5	3400	3.8

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.


外型尺寸及标准规格
Dimension & Specification

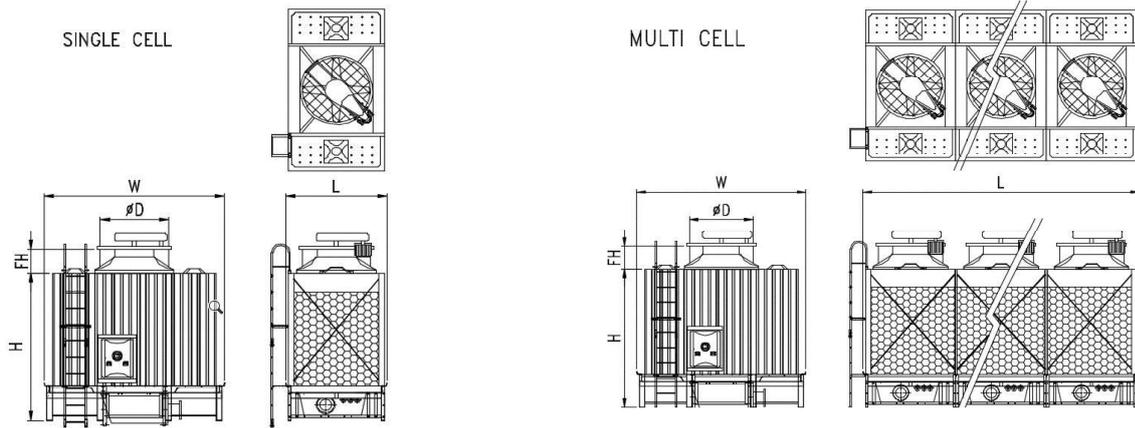

型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電動機 Fan Motor kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
1159-FLN	4280	5780	3925	650	294	11	3400	4.3
1159-FLP	4280	5780	3925	650	324	15	3400	4.3
1159-FLR	4280	5780	3925	650	349	18.5	3400	4.3
1159-FLT	4280	5780	3925	650	371	22	3400	4.3
1169-FLN	4880	5780	3925	650	342	11	3400	4.3
1169-FLP	4880	5780	3925	650	376	15	3400	4.3
1169-FLR	4880	5780	3925	650	405	18.5	3400	4.3
1169-FLT	4880	5780	3925	650	430	22	3400	4.3
1279-FLP	5480	6010	3925	650	399	15	3600	4.3
1279-FLR	5480	6010	3925	650	430	18.5	3600	4.3
1279-FLT	5480	6010	3925	650	457	22	3600	4.3
1279-FLU	5480	6010	3925	650	503	30	3600	4.3
1289-FLR	6080	6010	3925	650	455	18.5	3600	4.3
1289-FLT	6080	6010	3925	650	484	22	3600	4.3
1289-FLU	6080	6010	3925	650	532	30	3600	4.3
1289-FLV	6080	6010	3925	650	573	37	3600	4.3
1499-FLR	6380	6695	3925	700	505	18.5	4270	4.3
1499-FLT	6380	6695	3925	700	537	22	4270	4.3
1499-FLU	6380	6695	3925	700	591	30	4270	4.3
1499-FLV	6380	6695	3925	700	637	37	4270	4.3
11A9-FLT	4820	6338	6152	650	529	22	3400	5.9
11A9-FLU	4820	6338	6152	650	586	30	3400	5.9
11A9-FLV	4820	6338	6152	650	642	37	3400	5.9
12C9-FLU	5619	6568	6152	650	645	30	3600	5.9
12C9-FLV	5619	6568	6152	650	692	37	3600	5.9
12C9-FLW	5619	6568	6152	650	748	45	3600	5.9
12C9-FLX	5619	6568	6152	650	797	55	3600	5.9

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.


外型尺寸及标准规格
Dimension & Specification

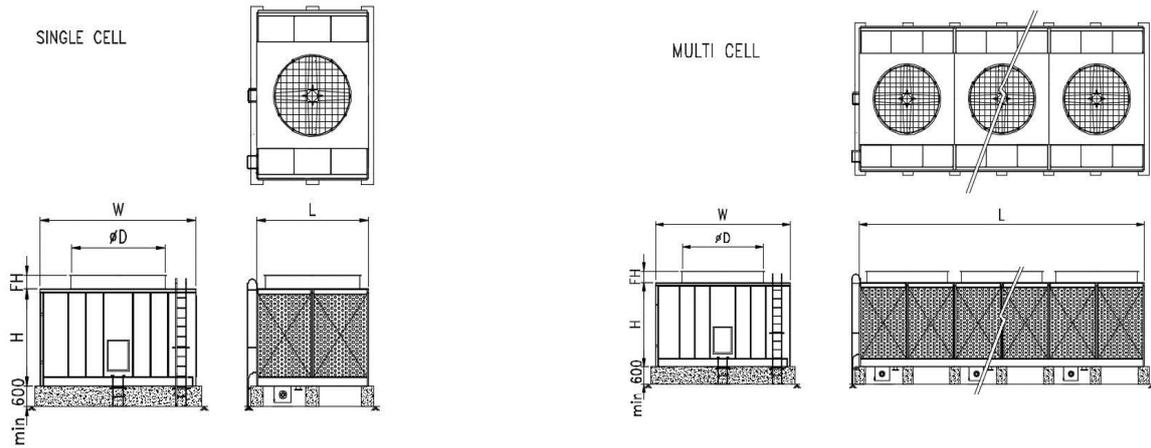

型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m^3/h	電動機 Fan Motor kW	風車 Fan Dia. $\phi m/m$	揚程 Head m
	L	W	H	FH				
509-GLG	1792	3440	2355	300	42	1.5	1500	3.3
509-GLH	1792	3440	2355	300	47	2.2	1500	3.3
509-GLK	1792	3440	2355	300	57	3.7	1500	3.3
509-GLJ	1792	3440	2355	300	57	4.0	1500	3.3
509-GLL	1792	3440	2355	300	65	5.5	1500	3.3
511-GLH	1792	3440	2655	300	55	2.2	1500	3.3
511-GLK	1792	3440	2655	300	66	3.7	1500	3.3
511-GLJ	1792	3440	2655	300	66	4.0	1500	3.3
511-GLL	1792	3440	2655	300	75	5.5	1500	3.3
511-GLM	1792	3440	2655	300	83	7.5	1500	3.3
514-GLH	2092	3440	2655	300	66	2.2	1500	3.3
514-GLK	2092	3440	2655	300	79	3.7	1500	3.3
514-GLJ	2092	3440	2655	300	79	4.0	1500	3.3
514-GLL	2092	3440	2655	300	90	5.5	1500	3.3
514-GLM	2092	3440	2655	300	99	7.5	1500	3.3
616-GLH	2092	3740	2655	300	79	2.2	1800	3.3
616-GLK	2092	3740	2655	300	94	3.7	1800	3.3
616-GLJ	2092	3740	2655	300	94	4.0	1800	3.3
616-GLL	2092	3740	2655	300	107	5.5	1800	3.3
616-GLM	2092	3740	2655	300	118	7.5	1800	3.3
719-GLH	2392	4040	2955	400	89	2.2	2100	3.6
719-GLK	2392	4040	2955	400	107	3.7	2100	3.6
719-GLJ	2392	4040	2955	400	107	4.0	2100	3.6
719-GLL	2392	4040	2955	400	121	5.5	2100	3.6
719-GLM	2392	4040	2955	400	133	7.5	2100	3.6
721-GLK	2692	4040	2955	400	110	3.7	2100	3.6
721-GLJ	2692	4040	2955	400	110	4.0	2100	3.6
721-GLL	2692	4040	2955	400	125	5.5	2100	3.6
721-GLM	2692	4040	2955	400	138	7.5	2100	3.6
721-GLN	2692	4040	2955	400	158	11	2100	3.6

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.


外型尺寸及标准规格
Dimension & Specification

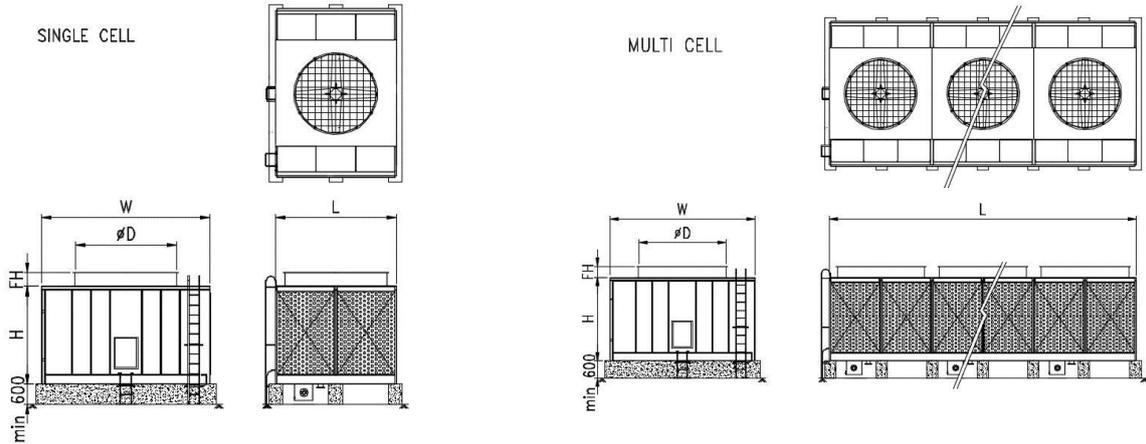

型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電動機 Fan Motor kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
724-GLK	2992	4040	2955	400	116	3.7	2100	3.8
724-GLJ	2992	4040	2955	400	116	4.0	2100	3.8
724-GLL	2992	4040	2955	400	133	5.5	2100	3.8
724-GLM	2992	4040	2955	400	146	7.5	2100	3.8
724-GLN	2992	4040	2955	400	168	11	2100	3.8
829-GLL	2992	4360	2955	400	140	5.5	2400	3.8
829-GLM	2992	4360	2955	400	154	7.5	2400	3.8
829-GLN	2992	4360	2955	400	176	11	2400	3.8
829-GLP	2992	4360	2955	400	194	15	2400	3.8
831-GLL	3332	4360	2955	400	156	5.5	2400	3.8
831-GLM	3332	4360	2955	400	171	7.5	2400	3.8
831-GLN	3332	4360	2955	400	196	11	2400	3.8
831-GLP	3332	4360	2955	400	216	15	2400	3.8
1034-GLL	3332	5000	2955	400	173	5.5	3000	3.8
1034-GLM	3332	5000	2955	400	190	7.5	3000	3.8
1034-GLN	3332	5000	2955	400	218	11	3000	3.8
1034-GLP	3332	5000	2955	400	239	15	3000	3.8
1036-GLM	3592	5000	2955	400	193	7.5	3000	3.8
1036-GLN	3592	5000	2955	400	221	11	3000	3.8
1036-GLP	3592	5000	2955	400	243	15	3000	3.8
1036-GLR	3592	5000	2955	400	262	18.5	3000	3.8
1039-GLM	3892	5000	2955	400	203	7.5	3000	3.8
1039-GLN	3892	5000	2955	400	232	11	3000	3.8
1039-GLP	3892	5000	2955	400	256	15	3000	3.8
1039-GLR	3892	5000	2955	400	275	18.5	3000	3.8
1144-GLM	4192	5400	2955	400	228	7.5	3400	3.8
1144-GLN	4192	5400	2955	400	261	11	3400	3.8
1144-GLP	4192	5400	2955	400	287	15	3400	3.8
1144-GLR	4192	5400	2955	400	310	18.5	3400	3.8
1149-GLM	4792	5400	2955	400	254	7.5	3400	3.8
1149-GLN	4792	5400	2955	400	290	11	3400	3.8
1149-GLP	4792	5400	2955	400	319	15	3400	3.8
1149-GLR	4792	5400	2955	400	344	18.5	3400	3.8

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.


外型尺寸及标准规格
Dimension & Specification

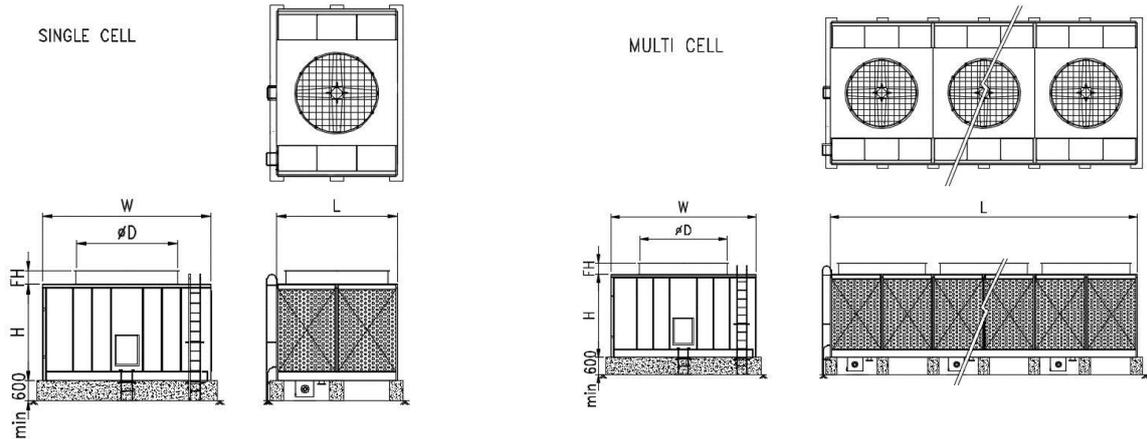

型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m^3/h	電動機 Fan Motor kW	風車 Fan Dia. $\phi m/m$	揚程 Head m
	L	W	H	FH				
1159-GLN	4292	5780	3405	400	294	11	3400	4.3
1159-GLP	4292	5780	3405	400	324	15	3400	4.3
1159-GLR	4292	5780	3405	400	349	18.5	3400	4.3
1159-GLT	4292	5780	3405	400	371	22	3400	4.3
1169-GLN	4892	5780	3405	400	342	11	3400	4.3
1169-GLP	4892	5780	3405	400	376	15	3400	4.3
1169-GLR	4892	5780	3405	400	405	18.5	3400	4.3
1169-GLT	4892	5780	3405	400	430	22	3400	4.3
1279-GLP	5492	6010	3405	400	399	15	3600	4.3
1279-GLR	5492	6010	3405	400	430	18.5	3600	4.3
1279-GLT	5492	6010	3405	400	457	22	3600	4.3
1279-GLU	5492	6010	3405	400	503	30	3600	4.3
1289-GLR	6190	6010	3405	400	455	18.5	3600	4.3
1289-GLT	6190	6010	3405	400	484	22	3600	4.3
1289-GLU	6190	6010	3405	400	532	30	3600	4.3
1289-GLV	6190	6010	3405	400	573	37	3600	4.3
1499-GLR	6490	6695	3405	400	505	18.5	4270	4.3
1499-GLT	6490	6695	3405	400	537	22	4270	4.3
1499-GLU	6490	6695	3405	400	591	30	4270	4.3
1499-GLV	6490	6695	3405	400	637	37	4270	4.3

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.


外型尺寸及标准规格
Dimension & Specification

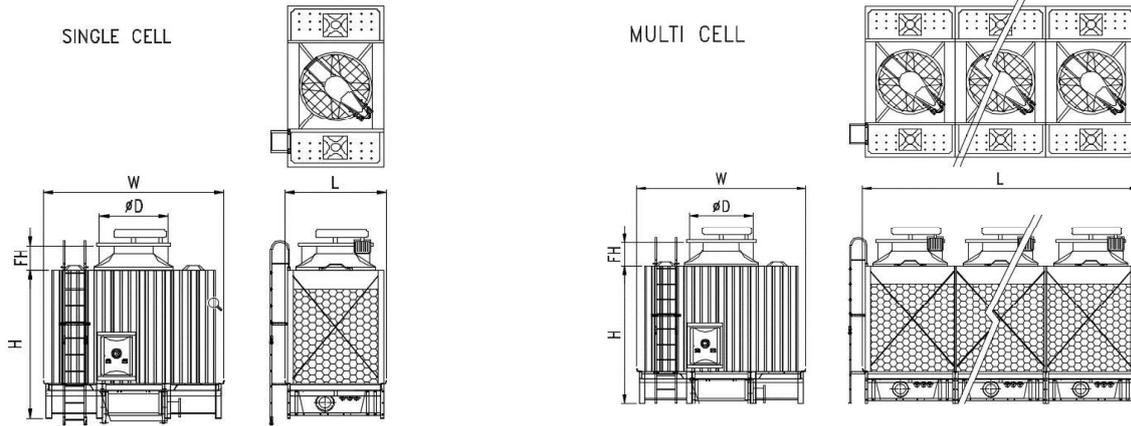

型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電動機 Fan Motor kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
509-FUG	1780	3440	2725	550	42	1.5	1500	3.3
511-FUH	1780	3440	3025	550	55	2.2	1500	3.3
514-FUH	2080	3440	3025	550	66	2.2	1500	3.3
616-FUH	2080	3740	3025	700	79	2.2	1800	3.3
719-FUH	2380	4040	3325	600	89	2.2	2100	3.6
721-FUK	2680	4040	3325	600	110	3.7	2100	3.6
721-FUJ	2680	4040	3325	600	110	4.0	2100	3.6
724-FUK	2980	4040	3475	600	116	3.7	2100	3.8
724-FUJ	2980	4040	3475	600	116	4.0	2100	3.8
829-FUL	2980	4360	3475	650	140	5.5	2400	3.8
831-FUL	3320	4360	3475	650	156	5.5	2400	3.8
1034-FUL	3320	5000	3475	650	173	5.5	3000	3.8
1036-FUM	3580	5000	3475	650	193	7.5	3000	3.8
1039-FUM	3880	5000	3475	650	203	7.5	3000	3.8
1144-FUM	4180	5400	3475	650	228	7.5	3400	3.8
1149-FUM	4780	5400	3475	650	254	7.5	3400	3.8
1159-FUN	4280	5780	3925	650	294	11	3400	4.3
1169-FUN	4880	5780	3925	650	342	11	3400	4.3
1279-FUP	5480	6010	3925	650	399	15	3600	4.3
1289-FUR	6080	6010	3925	650	455	18.5	3600	4.3
1499-FUR	6380	6695	3925	700	505	18.5	4270	4.3

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.

外型尺寸及标准规格
Dimension & Specification

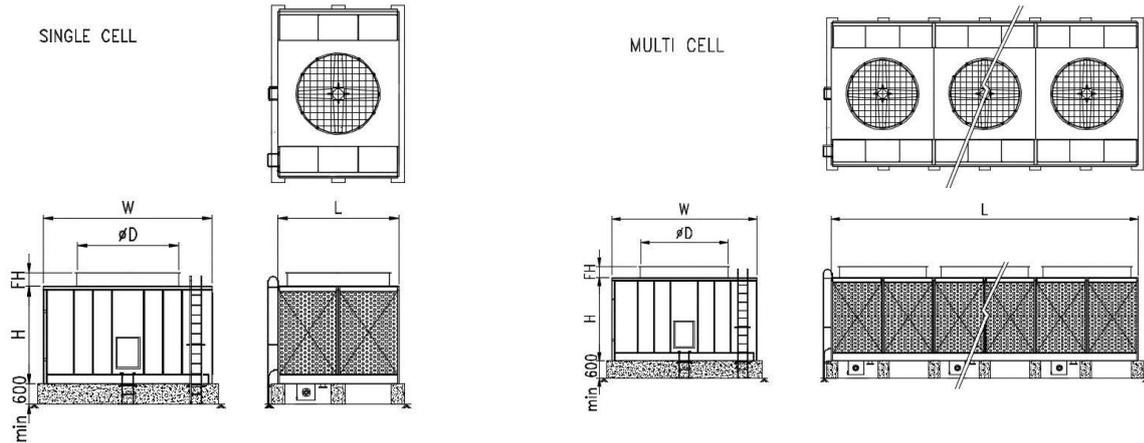


型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m^3/h	電動機 Fan Motor kW	風車 Fan Dia. $\phi m/m$	揚程 Head m
	L	W	H	FH				
509-GUG	1792	3440	2355	300	42	1.5	1500	3.3
511-GUH	1792	3440	2655	300	55	2.2	1500	3.3
514-GUH	2092	3440	2655	300	66	2.2	1500	3.3
616-GUH	2092	3740	2655	300	79	2.2	1800	3.3
719-GUH	2392	4040	2955	400	89	2.2	2100	3.6
721-GUK	2692	4040	2955	400	110	3.7	2100	3.6
721-GUJ	2692	4040	2955	400	110	4.0	2100	3.6
724-GUK	2992	4040	2955	400	116	3.7	2100	3.8
724-GUJ	2992	4040	2955	400	116	4.0	2100	3.8
829-GUL	2992	4360	2955	400	140	5.5	2400	3.8
831-GUL	3332	4360	2955	400	156	5.5	2400	3.8
1034-GUL	3332	5000	2955	400	173	5.5	3000	3.8
1036-GUM	3592	5000	2955	400	193	7.5	3000	3.8
1039-GUM	3892	5000	2955	400	203	7.5	3000	3.8
1144-GUM	4192	5400	2955	400	228	7.5	3400	3.8
1149-GUM	4792	5400	2955	400	254	7.5	3400	3.8
1159-GUN	4292	5780	3405	400	294	11	3400	4.3
1169-GUN	4892	5780	3405	400	342	11	3400	4.3
1279-GUP	5492	6010	3405	400	399	15	3600	4.3
1289-GUR	6190	6010	3405	400	455	18.5	3600	4.3
1499-GUR	6490	6695	3405	400	505	18.5	4270	4.3

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.

外型尺寸及标准规格

Dimension & Specification

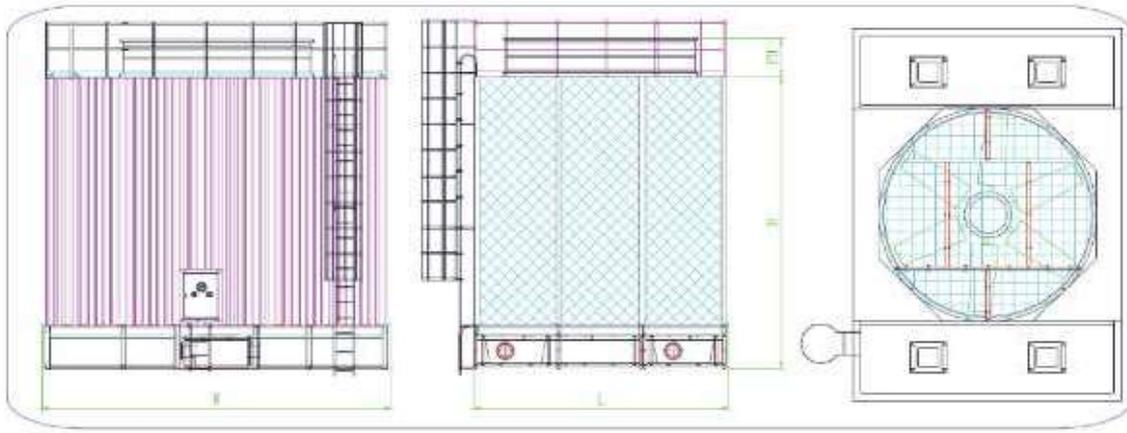


型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電機 Fan kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
T020-FLH	2580	4890	4560	600	113	2.2	2100	5.6
T020-FLK	2580	4890	4560	600	141	3.7	2100	5.6
T020-FLJ	2580	4890	4560	600	141	4	2100	5.6
T020-FLL	2580	4890	4560	600	161	5.5	2100	5.6
T020-FLM	2580	4890	4560	600	178	7.5	2100	5.6
T020-FLN	2580	4890	4560	600	202	11	2100	5.6
T025-FLK	2780	5210	4560	650	165	3.7	2400	5.6
T025-FLJ	2780	5210	4560	650	165	4	2400	5.6
T025-FLL	2780	5210	4560	650	183	5.5	2400	5.6
T025-FLM	2780	5210	4560	650	203	7.5	2400	5.6
T025-FLN	2780	5210	4560	650	231	11	2400	5.6
T025-FLP	2780	5210	4560	650	256	15	2400	5.6
T030-FLL	3000	5210	4970	650	222	5.5	2400	5.6
T030-FLM	3000	5210	4970	650	247	7.5	2400	5.6
T030-FLN	3000	5210	4970	650	280	11	2400	5.6
T030-FLP	3000	5210	4970	650	311	15	2400	5.6
T035-FLM	3200	5210	4970	650	253	7.5	2400	5.6
T035-FLN	3200	5210	4970	650	288	11	2400	5.6
T035-FLP	3200	5210	4970	650	319	15	2400	5.6
T035-FLR	3200	5210	4970	650	342	18.5	2400	5.6
T040-FLM	3620	5850	5120	650	289	7.5	3000	5.8
T040-FLN	3620	5850	5120	650	329	11	3000	5.8
T040-FLP	3620	5850	5120	650	365	15	3000	5.8
T040-FLR	3620	5850	5120	650	391	18.5	3000	5.8

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.

外型尺寸及標準規格

Dimension & Specification

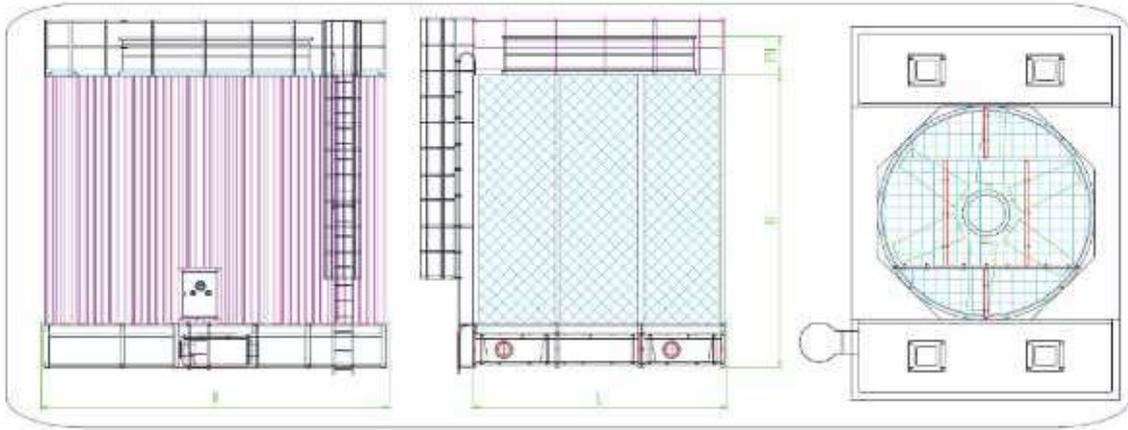


型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電機 Fan	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH		kW		
T050-FLN	3920	5850	5940	650	372	11	3000	6.6
T050-FLP	3920	5850	5940	650	413	15	3000	6.6
T050-FLR	3920	5850	5940	650	443	18.5	3000	6.6
T050-FLT	3920	5850	5940	650	469	22	3000	6.6
T060-FLN	4420	6480	5940	650	439	11	3600	6.6
T060-FLP	4420	6480	5940	650	487	15	3600	6.6
T060-FLR	4420	6480	5940	650	522	18.5	3600	6.6
T060-FLT	4420	6480	5940	650	553	22	3600	6.6
T060-FLU	4420	6480	5940	650	613	30	3600	6.6
T070-FLP	4920	6480	6360	650	524	15	3600	7
T070-FLR	4920	6480	6360	650	569	18.5	3600	7
T070-FLT	4920	6480	6360	650	597	22	3600	7
T070-FLU	4920	6480	6360	650	662	30	3600	7
T070-FLV	4920	6480	6360	650	710	37	3600	7
T080-FLP	4920	7170	6360	650	572	15	4270	7
T080-FLR	4920	7170	6360	650	614	18.5	4270	7
T080-FLT	4920	7170	6360	650	654	22	4270	7
T080-FLU	4920	7170	6360	650	731	30	4270	7
T080-FLV	4920	7170	6360	650	776	37	4270	7
T080-FLW	4920	7170	6360	650	830	45	4270	7

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.

外型尺寸及標準規格

Dimension & Specification

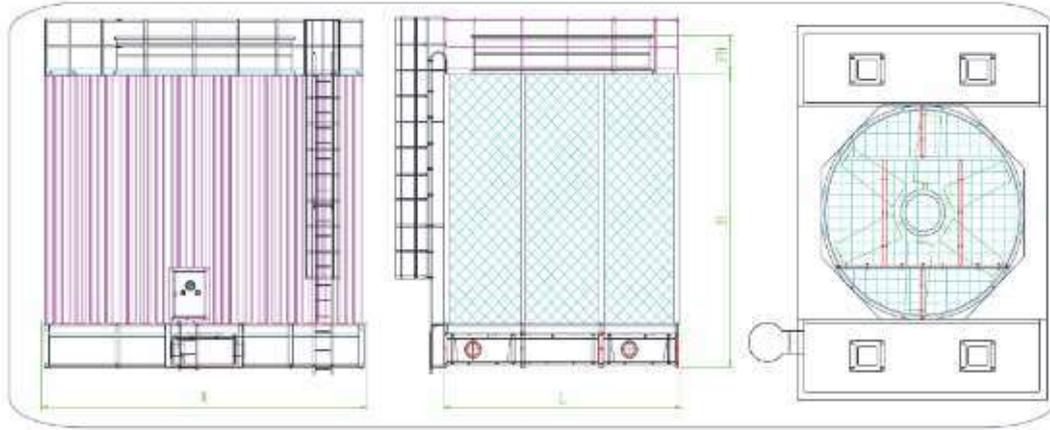


型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電機 Fan kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
T090-FLT	5620	7170	6360	700	694	22	4270	7
T090-FLU	5620	7170	6360	700	770	30	4270	7
T090-FLV	5620	7170	6360	700	829	37	4270	7
T090-FLW	5620	7170	6360	700	893	45	4270	7
T090-FLX	5620	7170	6360	700	948	55	4270	7
T100-FLU	6320	7170	6360	700	813	30	4270	7
T100-FLV	6320	7170	6360	700	872	37	4270	7
T100-FLW	6320	7170	6360	700	931	45	4270	7
T100-FLX	6320	7170	6360	700	995	55	4270	7
T100-FLY	6320	7170	6360	700	1103	75	4270	7
T110-FLU	6320	7780	6360	700	863	30	4880	7
T110-FLV	6320	7780	6360	700	926	37	4880	7
T110-FLW	6320	7780	6360	700	994	45	4880	7
T110-FLX	6320	7780	6360	700	1059	55	4880	7
T110-FLY	6320	7780	6360	700	1177	75	4880	7
T125-FLU	6255	9380	7360	700	941	30	5500	8.4
T125-FLV	6255	9380	7360	700	1009	37	5500	8.4
T125-FLW	6255	9380	7360	700	1077	45	5500	8.4
T125-FLX	6255	9380	7360	700	1151	55	5500	8.4
T140-FLV	6810	9380	7360	700	1064	37	5500	8.4
T140-FLW	6810	9380	7360	700	1135	45	5500	8.4
T140-FLX	6810	9380	7360	700	1216	55	5500	8.4
T140-FLY	6810	9380	7360	700	1346	75	5500	8.4

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.

外型尺寸及標準規格

Dimension & Specification

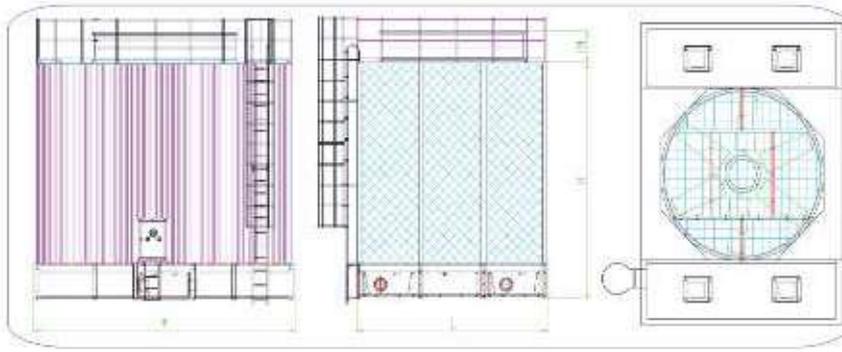


型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電機 Fan Motor kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
T150-FLV	6350	9530	7255	700	1110	37	5500	8.3
T150-FLW	6350	9530	7255	700	1184	45	5500	8.3
T150-FLX	6350	9530	7255	700	1266	55	5500	8.3
T150-FLY	6350	9530	7255	700	1404	75	5500	8.3
T150-FL2	6350	9530	7255	700	1492	90	5500	8.3
T160-FLV	6350	9530	7865	700	1160	37	5500	8.9
T160-FLW	6350	9530	7865	700	1239	45	5500	8.9
T160-FLX	6350	9530	7865	700	1324	55	5500	8.9
T160-FLY	6350	9530	7865	700	1468	75	5500	8.9
T160-FL2	6350	9530	7865	700	1560	90	5500	8.9
T170-FLW	6680	10030	7865	700	1311	45	6000	8.9
T170-FLX	6680	10030	7865	700	1402	55	6000	8.9
T170-FLY	6680	10030	7865	700	1555	75	6000	8.9
T170-FL2	6680	10030	7865	700	1652	90	6000	8.9
T180-FLW	6680	10030	8470	700	1373	45	6000	9.5
T180-FLX	6680	10030	8470	700	1471	55	6000	9.5
T180-FLY	6680	10030	8470	700	1631	75	6000	9.5
T180-FL2	6680	10030	8470	700	1716	90	6000	9.5
T190-FLW	7250	10030	8470	700	1420	45	6000	9.5
T190-FLX	7250	10030	8470	700	1520	55	6000	9.5
T190-FLY	7250	10030	8470	700	1689	75	6000	9.5
T190-FL2	7250	10030	8470	700	1798	90	6000	9.5
T200-FLW	7595	10740	8470	700	1512	45	6710	9.5
T200-FLX	7595	10740	8470	700	1635	55	6710	9.5
T200-FLY	7595	10740	8470	700	1790	75	6710	9.5
T200-FL2	7595	10740	8470	700	1896	90	6710	9.5

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.

外型尺寸及標準規格


Dimension & Specification

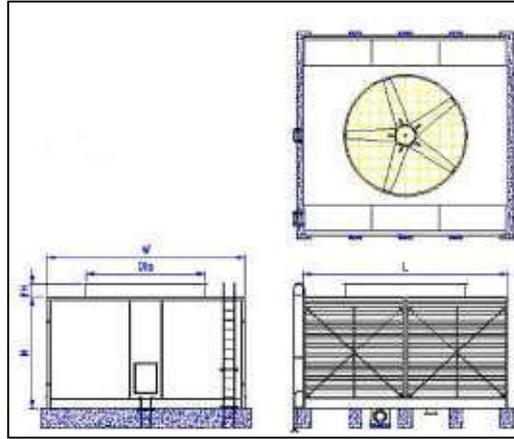

型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電機 Fan kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
T020-GLH	2500	5424	4000	400	113	2.2	2100	5.6
T020-GLK	2500	5424	4000	400	141	3.7	2100	5.6
T020-GLJ	2500	5424	4000	400	141	4	2100	5.6
T020-GLL	2500	5424	4000	400	161	5.5	2100	5.6
T020-GLM	2500	5424	4000	400	178	7.5	2100	5.6
T020-GLN	2500	5424	4000	400	202	11	2100	5.6
T025-GLK	2700	5724	4000	400	165	3.7	2400	5.6
T025-GLJ	2700	5724	4000	400	165	4	2400	5.6
T025-GLL	2700	5724	4000	400	183	5.5	2400	5.6
T025-GLM	2700	5724	4000	400	203	7.5	2400	5.6
T025-GLN	2700	5724	4000	400	231	11	2400	5.6
T025-GLP	2700	5724	4000	400	256	15	2400	5.6
T030-GLL	2900	5804	4400	400	222	5.5	2400	5.6
T030-GLM	2900	5804	4400	400	247	7.5	2400	5.6
T030-GLN	2900	5804	4400	400	280	11	2400	5.6
T030-GLP	2900	5804	4400	400	311	15	2400	5.6
T035-GLM	3100	5804	4400	400	253	7.5	2400	5.6
T035-GLN	3100	5804	4400	400	288	11	2400	5.6
T035-GLP	3100	5804	4400	400	319	15	2400	5.6
T035-GLR	3100	5804	4400	400	342	18.5	2400	5.6
T040-GLM	3500	6404	4400	400	289	7.5	3000	5.6
T040-GLN	3500	6404	4400	400	329	11	3000	5.6
T040-GLP	3500	6404	4400	400	365	15	3000	5.6
T040-GLR	3500	6404	4400	400	391	18.5	3000	5.6

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.


外型尺寸及標準規格
Dimension & Specification

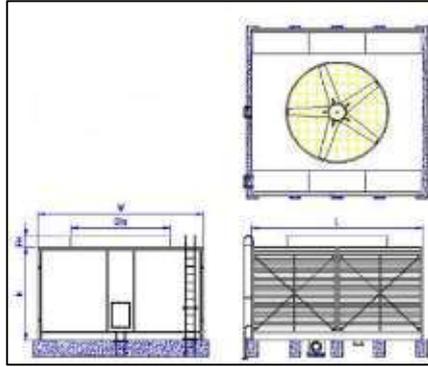

型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電機 Fan kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
T050-GLN	3800	6562	5210	400	372	11	3000	6.4
T050-GLP	3800	6562	5210	400	413	15	3000	6.4
T050-GLR	3800	6562	5210	400	443	18.5	3000	6.4
T050-GLT	3800	6562	5210	400	469	22	3000	6.4
T060-GLN	4300	7172	5210	400	439	11	3600	6.4
T060-GLP	4300	7172	5210	400	487	15	3600	6.4
T060-GLR	4300	7172	5210	400	522	18.5	3600	6.4
T060-GLT	4300	7172	5210	400	553	22	3600	6.4
T060-GLU	4300	7172	5210	400	613	30	3600	6.4
T070-GLP	4800	7252	5620	400	524	15	3600	6.8
T070-GLR	4800	7252	5620	400	569	18.5	3600	6.8
T070-GLT	4800	7252	5620	400	597	22	3600	6.8
T070-GLU	4800	7252	5620	400	662	30	3600	6.8
T070-GLV	4800	7252	5620	400	710	37	3600	6.8
T080-GLP	4800	7932	5620	750	572	15	4270	6.8
T080-GLR	4800	7932	5620	750	614	18.5	4270	6.8
T080-GLT	4800	7932	5620	750	654	22	4270	6.8
T080-GLU	4800	7932	5620	750	731	30	4270	6.8
T080-GLV	4800	7932	5620	750	776	37	4270	6.8
T080-GLW	4800	7932	5620	750	830	45	4270	6.8
T090-GLT	5500	7932	5620	750	694	22	4270	6.8
T090-GLU	5500	7932	5620	750	770	30	4270	6.8
T090-GLV	5500	7932	5620	750	829	37	4270	6.8
T090-GLW	5500	7932	5620	750	893	45	4270	6.8
T090-GLX	5500	7932	5620	750	948	55	4270	6.8

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.

外型尺寸及標準規格
Dimension & Specification

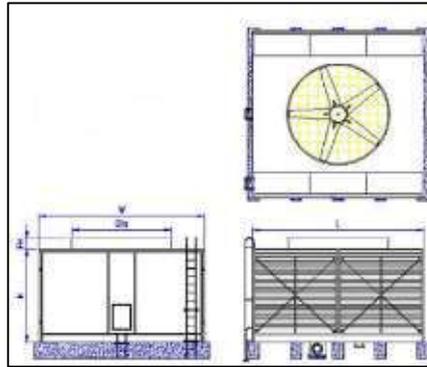


型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電機 Fan kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
T100-GLU	6200	7932	5620	750	813	30	4270	6.8
T100-GLV	6200	7932	5620	750	872	37	4270	6.8
T100-GLW	6200	7932	5620	750	931	45	4270	6.8
T100-GLX	6200	7932	5620	750	995	55	4270	6.8
T100-GLY	6200	7932	5620	750	1103	75	4270	6.8
T110-GLU	6200	8552	5620	750	863	30	4880	6.8
T110-GLV	6200	8552	5620	750	926	37	4880	6.8
T110-GLW	6200	8552	5620	750	994	45	4880	6.8
T110-GLX	6200	8552	5620	750	1059	55	4880	6.8
T110-GLY	6200	8552	5620	750	1177	75	4880	6.8
T125-GLU	6000	10010	6860	900	941	30	5500	6.8
T125-GLV	6000	10010	6860	900	1009	37	5500	6.8
T125-GLW	6000	10010	6860	900	1077	45	5500	6.8
T125-GLX	6000	10010	6860	900	1151	55	5500	6.8
T140-GLV	6600	10010	6860	900	1064	37	5500	6.8
T140-GLW	6600	10010	6860	900	1135	45	5500	6.8
T140-GLX	6600	10010	6860	900	1216	55	5500	6.8
T140-GLY	6600	10010	6860	900	1346	75	5500	6.8

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.

外型尺寸及標準規格

Dimension & Specification

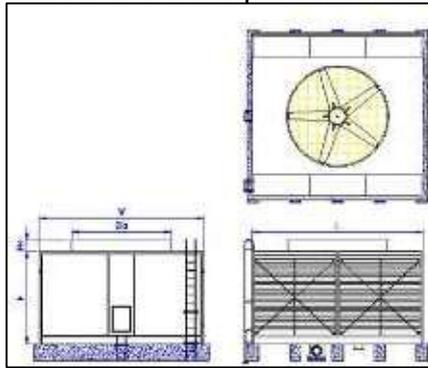


型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電機 Fan Motor kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
T150-GLV	6400	9630	6795	700	1110	37	5500	7.9
T150-GLW	6400	9630	6795	700	1184	45	5500	7.9
T150-GLX	6400	9630	6795	700	1266	55	5500	7.9
T150-GLY	6400	9630	6795	700	1404	75	5500	7.9
T150-GL2	6400	9630	6795	700	1492	90	5500	7.9
T160-GLV	6400	9630	7404	700	1160	37	5500	8.5
T160-GLW	6400	9630	7404	700	1239	45	5500	8.5
T160-GLX	6400	9630	7404	700	1324	55	5500	8.5
T160-GLY	6400	9630	7404	700	1468	75	5500	8.5
T160-GL2	6400	9630	7404	700	1560	90	5500	8.5
T170-GLW	6800	10130	7404	700	1311	45	6000	8.5
T170-GLX	6800	10130	7404	700	1402	55	6000	8.5
T170-GLY	6800	10130	7404	700	1555	75	6000	8.5
T170-GL2	6800	10130	7404	700	1652	90	6000	8.5
T180-GLW	6800	10130	8013	700	1373	45	6000	9.2
T180-GLX	6800	10130	8013	700	1471	55	6000	9.2
T180-GLY	6800	10130	8013	700	1631	75	6000	9.2
T180-GL2	6800	10130	8013	700	1716	90	6000	9.2
T190-GLW	7200	10130	8013	700	1420	45	6000	9.2
T190-GLX	7200	10130	8013	700	1520	55	6000	9.2
T190-GLY	7200	10130	8013	700	1689	75	6000	9.2
T190-GL2	7200	10130	8013	700	1798	90	6000	9.2
T200-GLW	7600	10840	8013	700	1512	45	6710	9.2
T200-GLX	7600	10840	8013	700	1635	55	6710	9.2
T200-GLY	7600	10840	8013	700	1790	75	6710	9.2
T200-GL2	7600	10840	8013	700	1896	90	6710	9.2

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.

外型尺寸及标准规格

Dimension & Specification

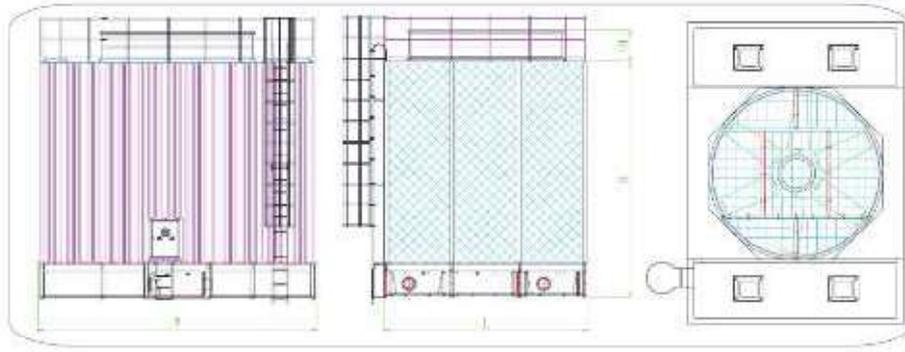


型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電機 Fan kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
T020-FUH	2580	4890	4560	600	113	2	2100	5.6
T025-FUK	2780	5210	4560	650	165	3.7	2400	5.6
T025-FUJ	2780	5210	4560	650	165	4	2400	5.6
T030-FUL	3000	5210	4970	650	222	5.5	2400	5.6
T035-FUM	3200	5210	4970	650	253	7.5	2400	5.6
T040-FUM	3620	5850	5120	650	289	7.5	3000	5.8
T050-FUN	3920	5850	5940	650	372	11	3000	6.6
T060-FUN	4420	6480	5940	650	439	11	3600	6.6
T070-FUP	4920	6480	6360	650	524	15	3600	7
T080-FUP	4920	7170	6360	650	572	15	4270	7
T090-FUT	5620	7170	6360	700	694	22	4270	7
T100-FUU	6320	7170	6360	700	813	30	4270	7
T110-FUU	6320	7780	6360	700	863	30	4880	7
T125-FUU	6255	9380	7360	700	941	30	5500	8.4
T140-FUV	6810	9380	7360	700	1064	37	5500	8.4

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.

外型尺寸及標準規格

Dimension & Specification

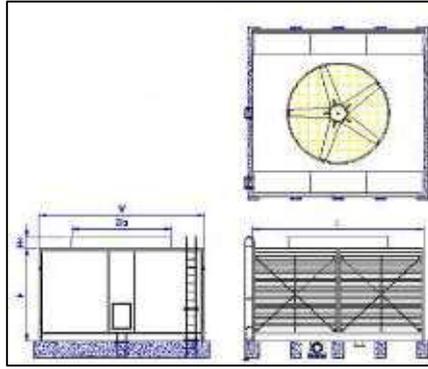


型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電機 Fan kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
T020-GUH	2500	5424	4000	400	113	2.2	2100	5.6
T025-GUK	2700	5724	4000	400	165	3.7	2400	5.6
T025-GUJ	2700	5724	4000	400	165	4	2400	5.6
T030-GUL	2900	5804	4400	400	222	5.5	2400	5.6
T035-GUM	3100	5804	4400	400	253	7.5	2400	5.6
T040-GUM	3500	6404	4400	400	289	7.5	3000	5.6
T050-GUN	3800	6562	5210	400	372	11	3000	6.4
T060-GUN	4300	7172	5210	400	439	11	3600	6.4
T070-GUP	4800	7252	5620	400	524	15	3600	6.8
T080-GUP	4800	7932	5620	750	572	15	4270	6.8
T090-GUT	5500	7932	5620	750	694	22	4270	6.8
T100-GUU	6200	7932	5620	750	813	30	4270	6.8
T110-GUU	6200	8552	5620	750	863	30	4880	6.8
T125-GUU	6000	10010	6860	900	941	30	5500	6.8
T140-GUV	6600	10010	6860	900	1064	37	5500	6.8

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.

外型尺寸及標準規格

Dimension & Specification

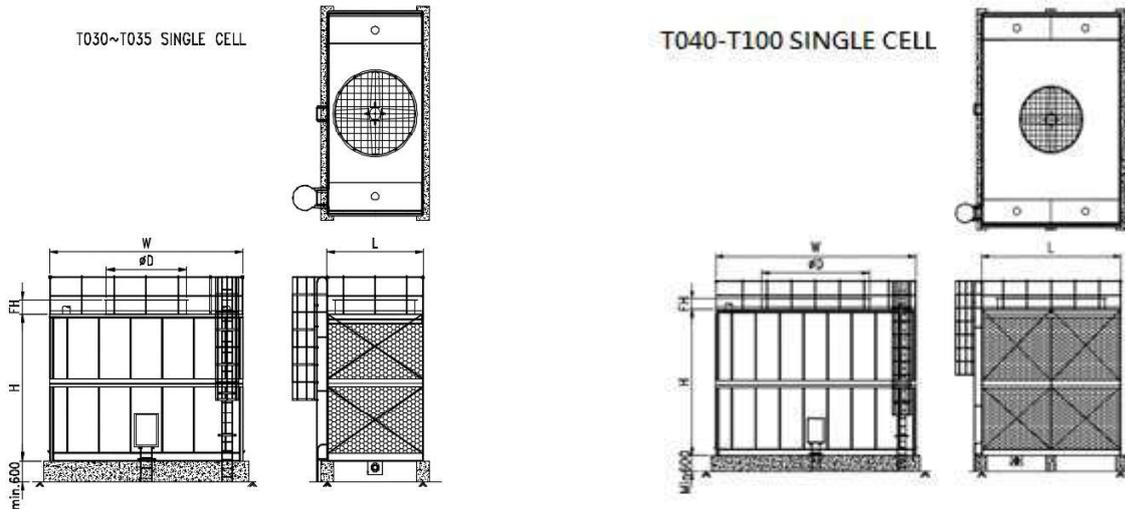


型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water HLow m3/h	電機 Fan Motor kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
T020-HLH	2500	5424	4000	400	113	2.2	2100	5.6
T020-HLK	2500	5424	4000	400	141	3.7	2100	5.6
T020-HLJ	2500	5424	4000	400	141	4	2100	5.6
T020-HLL	2500	5424	4000	400	161	5.5	2100	5.6
T020-HLL/IT	2500	5424	4000	400	161	5.5	2100	5.6
T020-HLM	2500	5424	4000	400	178	7.5	2100	5.6
T020-HLN	2500	5424	4000	400	202	11	2100	5.6
T025-HLK	2700	5724	4000	400	165	3.7	2400	5.6
T025-HLJ	2700	5724	4000	400	165	4	2400	5.6
T025-HLL	2700	5724	4000	400	183	5.5	2400	5.6
T025-HLL/IT	2700	5724	4000	400	183	5.5	2400	5.6
T025-HLM	2700	5724	4000	400	203	7.5	2400	5.6
T025-HLM/IT	2700	5724	4000	400	203	7.5	2400	5.6
T025-HLN	2700	5724	4000	400	231	11	2400	5.6
T025-HLP	2700	5724	4000	400	256	15	2400	5.6
T030-HLL	3008	5570	4342	400	222	5.5	2400	5.6
T030-HLM	3008	5570	4342	400	247	7.5	2400	5.6
T030-HLN	3008	5570	4342	400	280	11	2400	5.6
T030-HLP	3008	5570	4342	400	311	15	2400	5.6
T035-HLM	3208	5570	4342	400	253	7.5	2400	5.6
T035-HLN	3208	5570	4342	400	288	11	2400	5.6
T035-HLP	3208	5570	4342	400	319	15	2400	5.6
T035-HLR	3208	5570	4342	400	342	18.5	2400	5.6
T040-HLM	3508	6170	4342	400	289	7.5	3000	5.6
T040-HLN	3508	6170	4342	400	329	11	3000	5.6
T040-HLP	3508	6170	4342	400	365	15	3000	5.6
T040-HLR	3508	6170	4342	400	391	18.5	3000	5.6
T050-HLN	3808	6170	5167	400	372	11	3000	6.4
T050-HLP	3808	6170	5167	400	413	15	3000	6.4

Remarks: Nominal HLow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.

外型尺寸及標準規格

Dimension & Specification

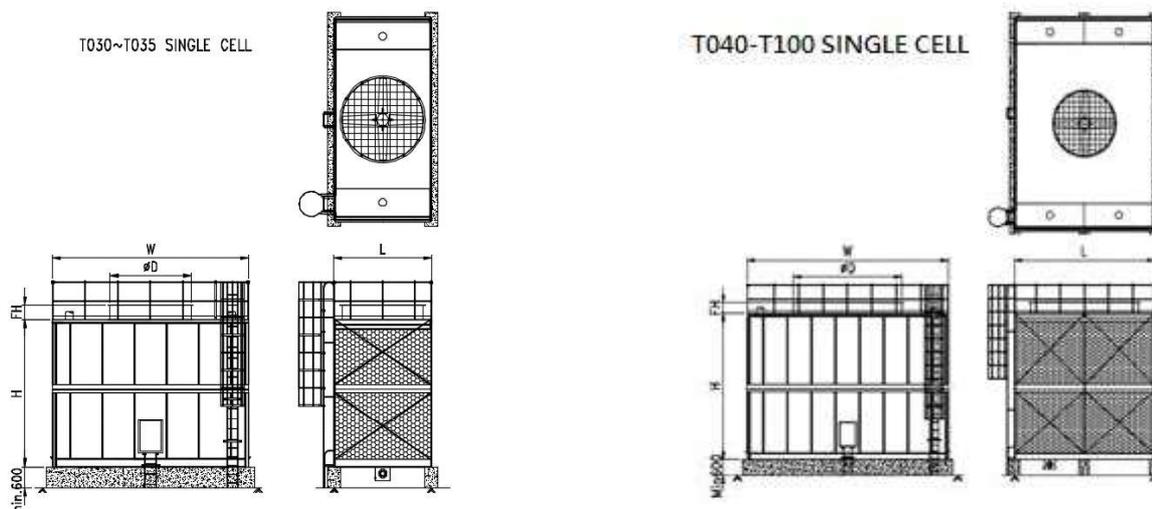


型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water HLow m ³ /h	電機 Fan Motor kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
T050-HLR	3808	6170	5167	400	443	18.5	3000	6.4
T050-HLT	3808	6170	5167	400	469	22	3000	6.4
T060-HLN	4407	6770	5167	400	439	11	3600	6.4
T060-HLP	4407	6770	5167	400	487	15	3600	6.4
T060-HLR	4407	6770	5167	400	522	18.5	3600	6.4
T060-HLT	4407	6770	5167	400	553	22	3600	6.4
T060-HLU	4407	6770	5167	400	613	30	3600	6.4
T070-HLP	4908	6770	5580	400	524	15	3600	6.8
T070-HLR	4908	6770	5580	400	569	18.5	3600	6.8
T070-HLT	4908	6770	5580	400	597	22	3600	6.8
T070-HLU	4908	6770	5580	400	662	30	3600	6.8
T070-HLV	4908	6770	5580	400	710	37	3600	6.8
T080-HLP	4908	7440	5580	400	572	15	4270	6.8
T080-HLR	4908	7440	5580	400	614	18.5	4270	6.8
T080-HLT	4908	7440	5580	400	654	22	4270	6.8
T080-HLU	4908	7440	5580	400	731	30	4270	6.8
T080-HLV	4908	7440	5580	400	776	37	4270	6.8
T080-HLW	4908	7440	5580	400	830	45	4270	6.8
T090-HLT	5607	7440	5580	400	694	22	4270	6.8
T090-HLU	5607	7440	5580	400	770	30	4270	6.8
T090-HLV	5607	7440	5580	400	829	37	4270	6.8
T090-HLW	5607	7440	5580	400	893	45	4270	6.8
T090-HLX	5607	7440	5580	400	948	55	4270	6.8
T100-HLU	6408	7440	5580	750	813	30	4270	6.8
T100-HLV	6408	7440	5580	750	872	37	4270	6.8
T100-HLW	6408	7440	5580	750	931	45	4270	6.8
T100-HLX	6408	7440	5580	750	995	55	4270	6.8
T100-HLY	6408	7440	5580	750	1103	75	4270	6.8

Remarks: Nominal HLow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.

外型尺寸及標準規格


Dimension & Specification

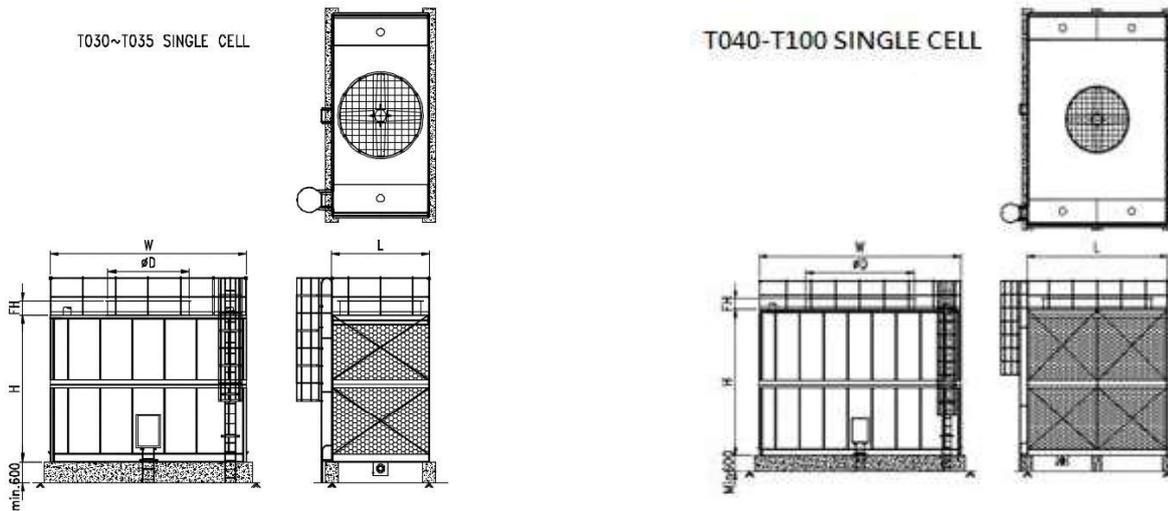

型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water HLow m3/h	電機 Fan Motor kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
T020-HUH	2500	5424	4000	400	113	2.2	2100	5.6
T025-HUK	2700	5724	4000	400	165	3.7	2400	5.6
T025-HUJ	2700	5724	4000	400	165	4	2400	5.6
T030-HUL	3008	5570	4342	400	222	5.5	2400	5.6
T035-HUM	3208	5570	4342	400	253	7.5	2400	5.6
T040-HUM	3508	6170	4342	400	289	7.5	3000	5.6
T050-HUN	3808	6710	5167	400	372	11	3000	6.4
T060-HUN	4407	6770	5167	400	439	11	3600	6.4
T070-HUP	4908	6770	5580	400	524	15	3600	6.8
T080-HUP	4908	7440	5580	400	572	15	4270	6.8
T090-HUT	5607	7440	5580	400	694	22	4270	6.8
T100-HUU	6408	7440	5580	750	813	30	4270	6.8

Remarks: Nominal HLow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.


外型尺寸及标准规格
Dimension & Specification

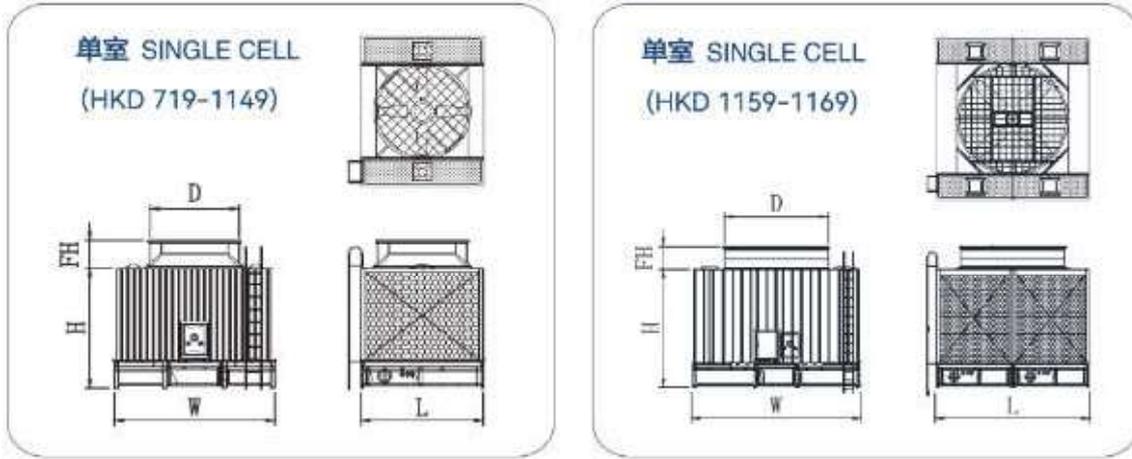

型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電動機 Fan Motor kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
721-FLL/IT	2680	4040	3325	600	125	5.5	2100	3.6
724-FLL/IT	2980	4040	3475	600	133	5.5	2100	3.8
831-FLL/IT	3320	4360	3475	650	156	5.5	2400	3.8
831-FLM/IT	3320	4360	3475	650	171	7.5	2400	3.8
1034-FLM/IT	3320	5000	3475	650	190	7.5	3000	3.8
1039-FLM/IT	3880	5000	3475	650	203	7.5	3000	3.8
1039-FLN/IT	3880	5000	3475	650	232	11	3000	3.8
1144-FLN/IT	4180	5400	3475	650	261	11	3400	3.8
1149-FLN/IT	4780	5400	3475	650	290	11	3400	3.8
1159-FLN/IT	4280	5780	3925	650	294	11	3400	4.3
1159-FLP/IT	4280	5780	3925	650	324	15	3400	4.3
1169-FLN/IT	4880	5780	3925	650	342	11	3400	4.3
1169-FLP/IT	4880	5780	3925	650	376	15	3400	4.3
1279-FLP/IT	5480	6010	3925	650	399	15	3600	4.3
1279-FLR/IT	5480	6010	3925	650	430	18.5	3600	4.3
1289-FLR/IT	6080	6010	3925	650	455	18.5	3600	4.3
1289-FLT/IT	6080	6010	3925	650	484	22	3600	4.3
1499-FLR/IT	6380	6695	3925	700	505	18.5	4270	4.3
1499-FLT/IT	6380	6695	3925	700	537	22	4270	4.3

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.

外型尺寸及标准规格
Dimension & Specification

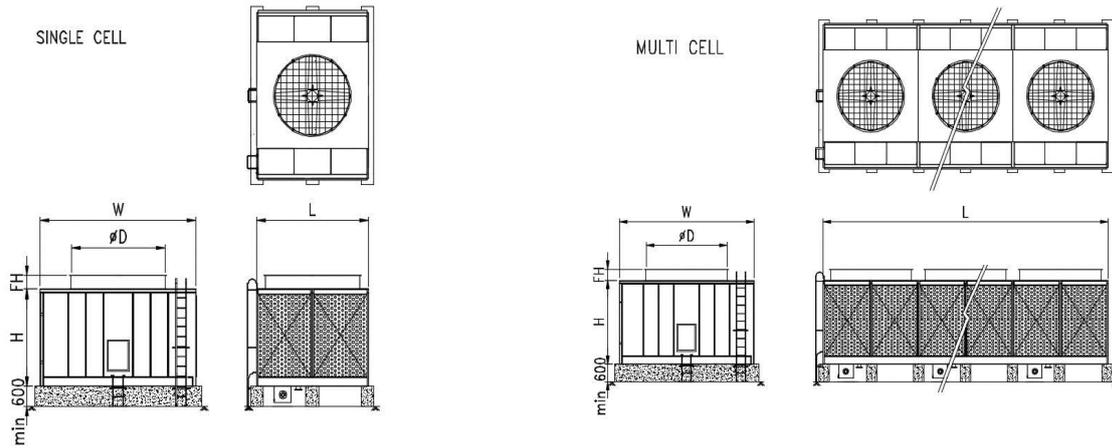


型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電動機 Fan Motor kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
721-GLL/IT	2692	4040	2955	400	125	5.5	2100	3.6
724-GLL/IT	2992	4040	2955	400	133	5.5	2100	3.8
831-GLL/IT	3332	4360	2955	400	156	5.5	2400	3.8
831-GLM/IT	3332	4360	2955	400	171	7.5	2400	3.8
1034-GLM/IT	3332	5000	2955	400	190	7.5	3000	3.8
1039-GLM/IT	3892	5000	2955	400	203	7.5	3000	3.8
1039-GLN/IT	3892	5000	2955	400	232	11	3000	3.8
1144-GLN/IT	4192	5400	2955	400	261	11	3400	3.8
1149-GLN/IT	4792	5400	2955	400	290	11	3400	3.8
1159-GLN/IT	4292	5780	3405	400	294	11	3400	4.3
1159-GLP/IT	4292	5780	3405	400	324	15	3400	4.3
1169-GLN/IT	4892	5780	3405	400	342	11	3400	4.3
1169-GLP/IT	4892	5780	3405	400	376	15	3400	4.3
1279-GLP/IT	5492	6010	3405	400	399	15	3600	4.3
1279-GLR/IT	5492	6010	3405	400	430	18.5	3600	4.3
1289-GLR/IT	6190	6010	3405	400	455	18.5	3600	4.3
1289-GLT/IT	6190	6010	3405	400	484	22	3600	4.3
1499-GLR/IT	6490	6695	3405	400	505	18.5	4270	4.3
1499-GLT/IT	6490	6695	3405	400	537	22	4270	4.3

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.

外型尺寸及标准规格

Dimension & Specification

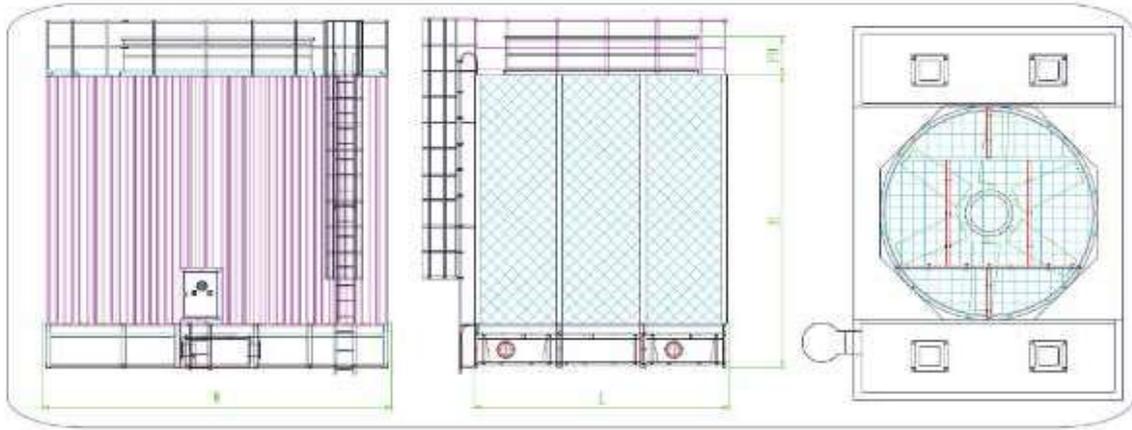


型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電機 Fan Motor	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH		kW		
T020-FLL/IT	2580	4890	4560	600	161	5.5	2100	5.6
T025-FLL/IT	2780	5210	4560	650	183	5.5	2400	5.6
T025-FLM/IT	2780	5210	4560	650	203	7.5	2400	5.6
T030-FLL/IT	3000	5210	4970	650	222	5.5	2400	5.6
T030-FLM/IT	3000	5210	4970	650	247	7.5	2400	5.6
T035-FLN/IT	3200	5210	4970	650	288	11	2400	5.6
T040-FLN/IT	3620	5850	5120	650	329	11	3000	5.8
T050-FLN/IT	3920	5850	5940	650	372	11	3000	6.6
T050-FLP/IT	3920	5850	5940	650	413	15	3000	6.6
T060-FLN/IT	4420	6480	5940	650	439	11	3600	6.6
T060-FLP/IT	4420	6480	5940	650	487	15	3600	6.6
T070-FLP/IT	4920	6480	6360	650	524	15	3600	7
T070-FLR/IT	4920	6480	6360	650	569	18.5	3600	7
T080-FLR/IT	4920	7170	6360	650	614	18.5	4270	7
T080-FLT/IT	4920	7170	6360	650	654	22	4270	7
T090-FLT/IT	5620	7170	6360	700	694	22	4270	7
T090-FLU/IT	5620	7170	6360	700	770	30	4270	7
T100-FLU/IT	6320	7170	6360	700	813	30	4270	7
T100-FLV/IT	6320	7170	6360	700	872	37	4270	7
T110-FLU/IT	6320	7780	6360	700	863	30	4880	7
T110-FLV/IT	6320	7780	6360	700	926	37	4880	7

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.

外型尺寸及標準規格

Dimension & Specification

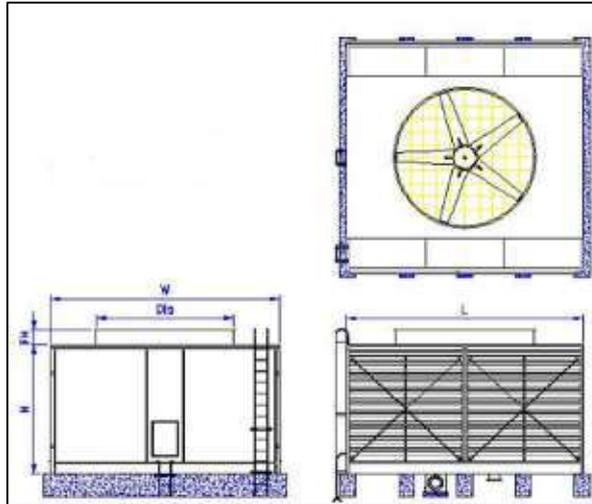


型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電機 Fan Motor kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
T020-GLL/IT	2500	5424	4000	400	161	5.5	2100	5.6
T025-GLL/IT	2700	5724	4000	400	183	5.5	2400	5.6
T025-GLM/IT	2700	5724	4000	400	203	7.5	2400	5.6
T030-GLL/IT	2900	5804	4400	400	222	5.5	2400	5.6
T030-GLM/IT	2900	5804	4400	400	247	7.5	2400	5.6
T035-GLN/IT	3100	5804	4400	400	288	11	2400	5.6
T040-GLN/IT	3500	6404	4400	400	329	11	3000	5.6
T050-GLN/IT	3800	6562	5210	400	372	11	3000	6.4
T050-GLP/IT	3800	6562	5210	400	413	15	3000	6.4
T060-GLN/IT	4300	7172	5210	400	439	11	3600	6.4
T060-GLP/IT	4300	7172	5210	400	487	15	3600	6.4
T070-GLP/IT	4800	7252	5620	400	524	15	3600	6.8
T070-GLR/IT	4800	7252	5620	400	569	18.5	3600	6.8
T080-GLR/IT	4800	7932	5620	750	614	18.5	4270	6.8
T080-GLT/IT	4800	7932	5620	750	654	22	4270	6.8
T090-GLT/IT	5500	7932	5620	750	694	22	4270	6.8
T090-GLU/IT	5500	7932	5620	750	770	30	4270	6.8
T100-GLU/IT	6200	7932	5620	750	813	30	4270	6.8
T100-GLV/IT	6200	7932	5620	750	872	37	4270	6.8
T110-GLU/IT	6200	8552	5620	750	863	30	4880	6.8
T110-GLV/IT	6200	8552	5620	750	926	37	4880	6.8

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.

外型尺寸及标准规格

Dimension & Specification

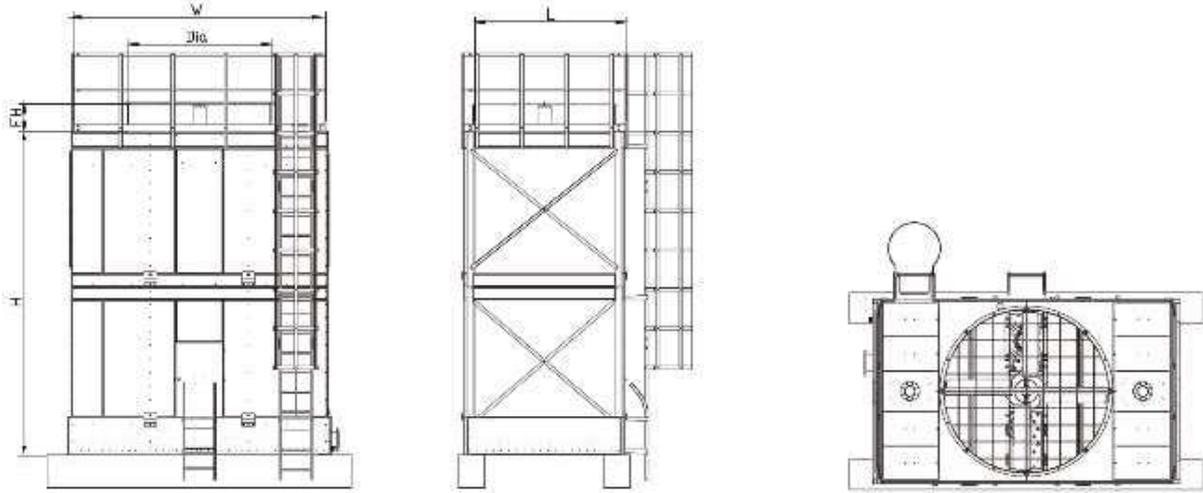


型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電機 Fan kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
B020-GLL	2440	3980	4975	400	158	5.5	2100	5.5
B020-GNM	2440	3980	4975	400	169	7.5	2100	5.5
B020-GNN	2440	3980	4975	400	187	11	2100	5.5
B025-GLM	2700	3980	4975	400	175	7.5	2100	5.5
B025-GNN	2700	3980	4975	400	193	11	2100	5.5
B025-GNP	2700	3980	4975	400	212	15	2100	5.5
B030-GLN	2900	4590	4975	400	245	11	2400	5.5
B030-GNP	2900	4590	4975	400	270	15	2400	5.5
B030-GNR	2900	4590	4975	400	286	18.5	2400	5.5
B035-GLN	3200	4590	4975	400	256	11	2400	5.5
B035-GNP	3200	4590	4975	400	276	15	2400	5.5
B035-GNR	3200	4590	4975	400	289	18.5	2400	5.5
B040-GLN	3400	5190	4975	400	294	11	3000	5.5
B040-GNP	3400	5190	4975	400	314	15	3000	5.5
B040-GNR	3400	5190	4975	400	330	18.5	3000	5.5
B045-GLP	3700	5190	5390	400	346	15	3000	5.9
B045-GNR	3700	5190	5390	400	361	18.5	3000	5.9
B045-GNT	3700	5190	5390	400	373	22	3000	5.9

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.

外型尺寸及标准规格

Dimension & Specification

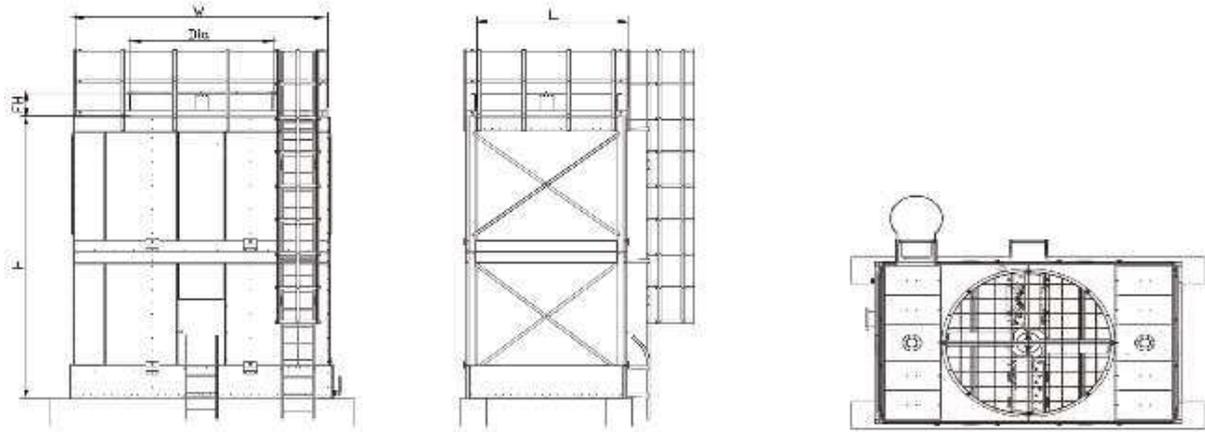


型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電機 Fan kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
B050-GLP	3700	6070	5390	400	411	15	3200	5.9
B050-GNR	3700	6070	5390	400	428	18.5	3200	5.9
B050-GNT	3700	6070	5390	400	442	22	3200	5.9
B055-GLP	3900	6070	5390	400	439	15	3200	5.9
B055-GNR	3900	6070	5390	400	455	18.5	3200	5.9
B055-GNT	3900	6070	5390	400	477	22	3200	5.9
B060-GLR	3900	6270	5800	400	462	18.5	3400	6.3
B060-GNT	3900	6270	5800	400	494	22	3400	6.3
B060-GNU	3900	6270	5800	400	537	30	3400	6.3
B065-GLR	4100	6870	5800	400	543	18.5	3600	6.3
B065-GNT	4100	6870	5800	400	562	22	3600	6.3
B065-GNU	4100	6870	5800	400	607	30	3600	6.3
B070-GLR	4500	6870	5800	400	547	18.5	3600	6.3
B070-GNT	4500	6870	5800	400	564	22	3600	6.3
B070-GNU	4500	6870	5800	400	611	30	3600	6.3
B075-GLR	4700	6870	5800	400	565	18.5	3600	6.3
B075-GNT	4700	6870	5800	400	582	22	3600	6.3
B075-GNU	4700	6870	5800	400	631	30	3600	6.3

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.

外型尺寸及标准规格

Dimension & Specification

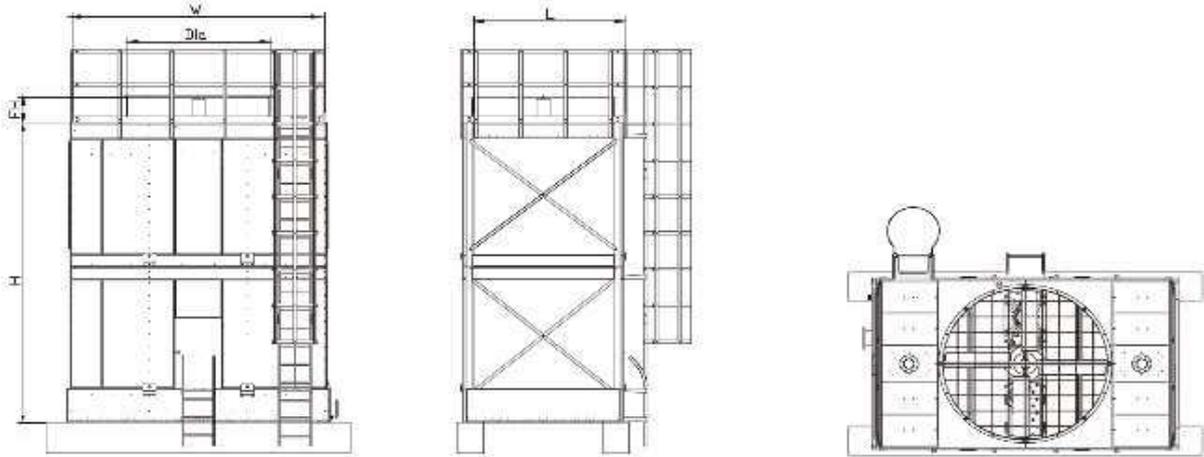


型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電機 Fan kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
B080-GLT	4500	7270	5800	750	602	22	4000	6.3
B080-GNU	4500	7270	5800	750	654	30	4000	6.3
B080-GNV	4500	7270	5800	750	680	37	4000	6.3
B090-GLU	4800	7270	5800	750	719	30	4000	6.3
B090-GNV	4800	7270	5800	750	750	37	4000	6.3
B090-GNW	4800	7270	5800	750	783	45	4000	6.3
B095-GLU	5300	7470	5800	750	743	30	4200	6.3
B095-GNV	5300	7470	5800	750	777	37	4200	6.3
B095-GNW	5300	7470	5800	750	810	45	4200	6.3
B100-GLU	6000	7470	5800	750	785	30	4200	6.3
B100-GNV	6000	7470	5800	750	823	37	4200	6.3
B100-GNW	6000	7470	5800	750	878	45	4200	6.3
B110-GLV	6000	8570	5800	750	900	37	4700	6.3
B110-GNW	6000	8570	5800	750	961	45	4700	6.3
B110-GNX	6000	8570	5800	750	1027	55	4700	6.3
B120-GLV	6000	9070	5800	750	961	37	5200	6.3
B120-GNW	6000	9070	5800	750	1027	45	5200	6.3
B120-GNX	6000	9070	5800	750	1100	55	5200	6.3
B130-GLV	6200	9070	5800	750	978	37	5200	6.3
B130-GNW	6200	9070	5800	750	1045	45	5200	6.3
B130-GNX	6200	9070	5800	750	1118	55	5200	6.3
B140-GLW	6200	9570	5800	750	1104	45	5700	6.3
B140-GNX	6200	9570	5800	750	1181	55	5700	6.3
B140-GNY	6200	9570	5800	750	1312	75	5700	6.3

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.

外型尺寸及标准规格

Dimension & Specification

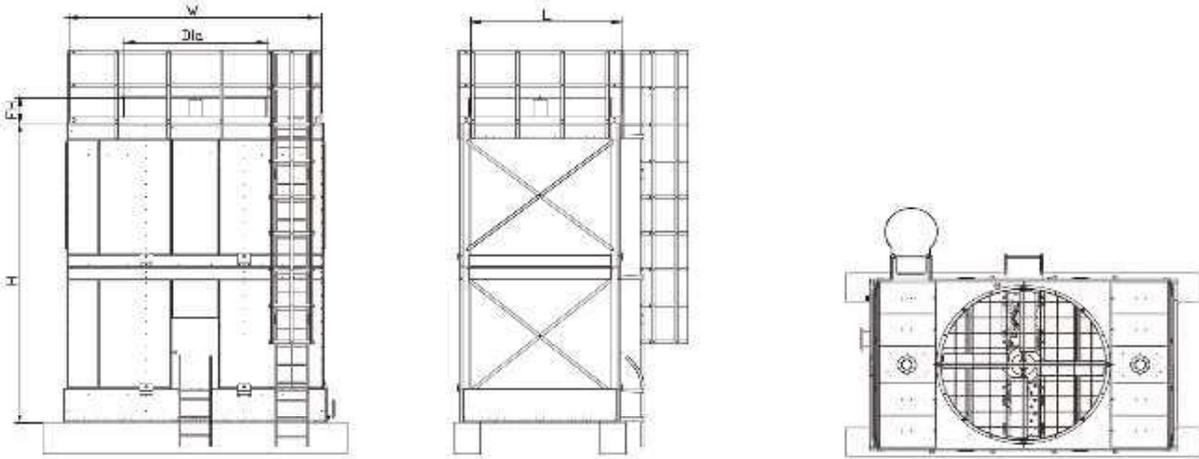

型號 Model HKD	外型尺寸 Dimension (mm)				水量 Water Flow m ³ /h	電機 Fan kW	風車 Fan Dia. φm/m	揚程 Head m
	L	W	H	FH				
B020-GUL	2440	3980	4975	400	158	5.5	2100	5.5
B025-GUM	2700	3980	4975	400	175	7.5	2100	5.5
B030-GUN	2900	4590	4975	400	245	11	2400	5.5
B035-GUN	3200	4590	4975	400	256	11	2400	5.5
B040-GUN	3400	5190	4975	400	294	11	3000	5.5
B045-GUP	3700	5190	5390	400	346	15	3000	5.9
B050-GUP	3700	6070	5390	400	411	15	3200	5.9
B055-GUP	3900	6070	5390	400	439	15	3200	5.9
B060-GUR	3900	6270	5800	400	462	18.5	3400	6.3
B065-GUR	4100	6870	5800	400	543	18.5	3600	6.3
B070-GUR	4500	6870	5800	400	547	18.5	3600	6.3
B075-GUR	4700	6870	5800	400	565	18.5	3600	6.3
B080-GUT	4500	7270	5800	750	602	22	4000	6.3
B090-GUU	4800	7270	5800	750	719	30	4000	6.3
B095-GUU	5300	7470	5800	750	743	30	4200	6.3
B100-GUU	6000	7470	5800	750	785	30	4200	6.3
B110-GUV	6000	8570	5800	750	900	37	4700	6.3
B120-GUV	6000	9070	5800	750	961	37	5200	6.3
B130-GUV	6200	9070	5800	750	978	37	5200	6.3
B140-GUW	6200	9570	5800	750	1104	45	5700	6.3

Remarks: Nominal flow rate is based on inlet temperature at 35°C, Outlet temperature at 29.4°C, Wet Bulb temperature at 25.6°C.

